

Indicator Lights Neon, LED and Filament Lamp










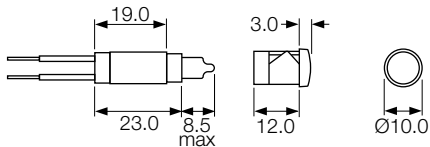





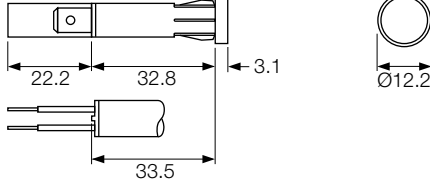














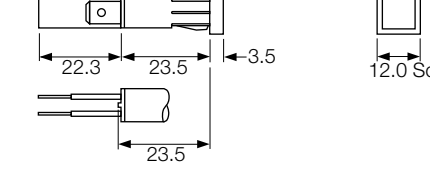












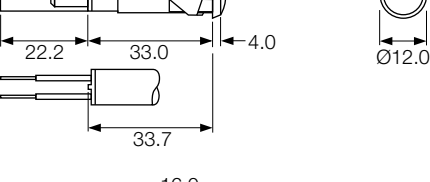















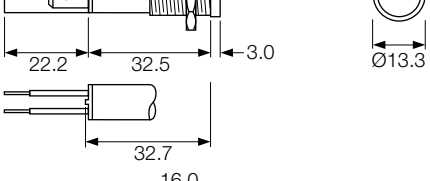














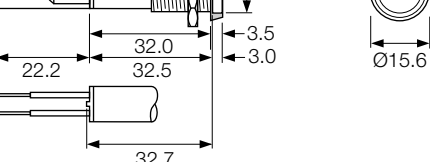









Colours and voltages:


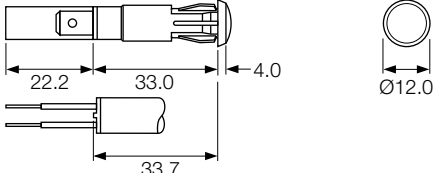

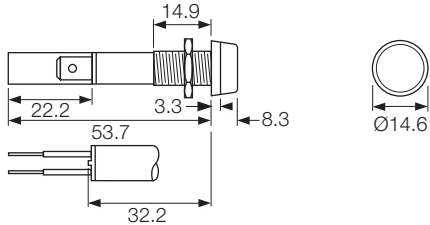

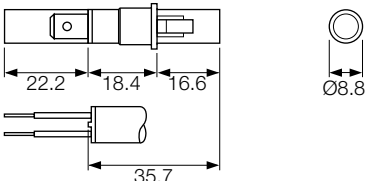

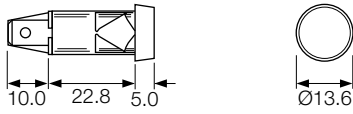

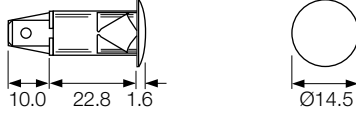

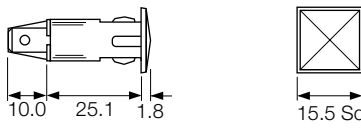
-  **Neon** Available with Red, Amber, Green or Clear lenses
100/130V (marked 110V), 200/250V (marked 230V)
-  **LED - DC** Red, Yellow, Green, Blue, White
2.0/2.2V Resistors for other voltages available.
-  **LED - AC** Red, Yellow, Green, Blue, White
110-230V ac operation.
-  **Filament lamp** Available with Red, Amber, Green, Clear or Blue lenses
6V, 12/14V, 24/28V.

- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm diameter
- ▶ Red, amber, green, blue and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles

To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
L	(L) 0569 AW	 9.0  0.8-2.5  Call sales	   	 	
L	(C) 0273 00	 9.0		  	
K 2.8		 2.0 max			
H 4.8		 page 6		 	
C 6.3					
L	(C) 0278 00	 9.0		  	
K 2.8		 2.0 max			
H 4.8		 page 6			
C 6.3					
L	(C) 0276 AA	 9.5		  	
K 2.8		 0.8-2.8			
H 4.8		 page 6		  	
C 6.3					
L	(C) 0275 00	 10.0		  	
K 2.8		 12.0 max			
H 4.8		 page 6		 	
C 6.3					
L	(C) 0275 00 Chrome bezel	 10.0		  	
K 2.8		 11.5 max			
H 4.8		 page 6		 	
C 6.3					

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
L K 2.8 H 4.8 C 6.3	(C) 0276 00 	10.0 2.8 max page 6	DC AC	KEMA KEMA KEMA	
L K 2.8 H 4.8 C 6.3	(C) 0277 00 Chrome bezel 	10.0 12.0 max page 6	DC AC	KEMA KEMA KEMA	
L K 2.8 H 4.8 C 6.3	(C) 0273 LL 	10.0 0.6-2.0 page 6	DC AC	KEMA KEMA KEMA	For sub-panel mounting, behind a facia. 
L K 2.8 H 4.8 C 6.3	(C) 2820 00 	12.0 0.75-2.0 page 6	DC AC	KEMA KEMA KEMA	
L K 2.8 H 4.8 C 6.3	(C) 2821 00 	12.0 or 12.7 Ø12.0 = 0.8-2.5 Ø12.7 = 1.1-2.5 page 6	DC AC	KEMA KEMA KEMA	
L K 2.8 H 4.8 C 6.3	(C) 0586 00 	12.5 0.8-1.5 page 6	DC AC	KEMA KEMA KEMA	

Indicators

Technical Information - Indicators

The majority of Arcoelectric indicator lights can be supplied with alternative light sources:

Neon, Fluorescent, Filament lamp or LED.

NEON and FLUORESCENT LAMPS

Colours

Available with Red, Amber, Green, Blue or Clear lenses.

Maximum striking voltages

Standard brightness types 65Vac 90Vdc.

High brightness types 85Vac 135Vdc.

High brightness types are usually fitted.

Life

Typically 25,000 hours (Green fluorescent lamps 20,000 hours). (Measured to a point when the light output of the lamp is half its original level.)

The end of life for a neon lamp is not usually a sudden failure.

False signals due to long wiring

It is possible for neon or fluorescent tubes to glow when they should be off. The false signal is caused by the capacitance effect of fairly long wiring to the indicator being adjacent to other live cables. This effect can be prevented in most cases by fitting a 100k resistor across the supply wires close to the indicator assembly.

MATERIALS

Moulded bodies and basesNylon 6.6

Metal bodies and bezelsChrome plated brass (except #)

LensesPolycarbonate

Terminals (most types)Brass (electro-tin plated)

Terminals (exceptions)Brass (flash silver* or nickel** plated)

Threaded metal nutsBrass (nickel plated on 0275/7)

Other fixingsCall sales for details

* R9, 0061, 0062, 0430, 0480, 1090, 1091, 6030, 7030, 8630, 8580

** # 3130, 3160, 3161, 3221 have nickel plated terminals with steel screws and plated polyamide bezel trims

FILAMENT LAMPS

Colours

Available with Red, Amber, Green, Clear or Blue lenses.

LEDs - DC

Colours

Red, Yellow, Green, Blue and White.

Voltage

Basic voltage 2.0/2.2V. Some items are available with integral resistors for 12V use. For details of resistors required for higher voltages, please call sales.

Current

Maximum continuous forward current 20mA.

Life

>100,000hrs

LEDs - AC

Colours

Red, Yellow, Green, Blue and White.

Voltage

Rated up to 230V ac, suitable for use at 110V and 230V ac.

Current

<3mA

Life

>100,000hrs

TEMPERATURE RATING

Authority	with Terminals	with Wire leads	
		PVC	SILICONE
European	T125°C	T105°C	T125°C
UL	T65/75°C	T65/75°C	

SYMBOLS

 Terminals
C 6.3, H 4.8, K 2.8

 Wire leads
200mm long Standard

 Solid wires
LED only

 Panel hole size

 Panel thickness

 Temperature rating