THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - -.
© COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECO-18-008015	24MAY2018	AP	DG

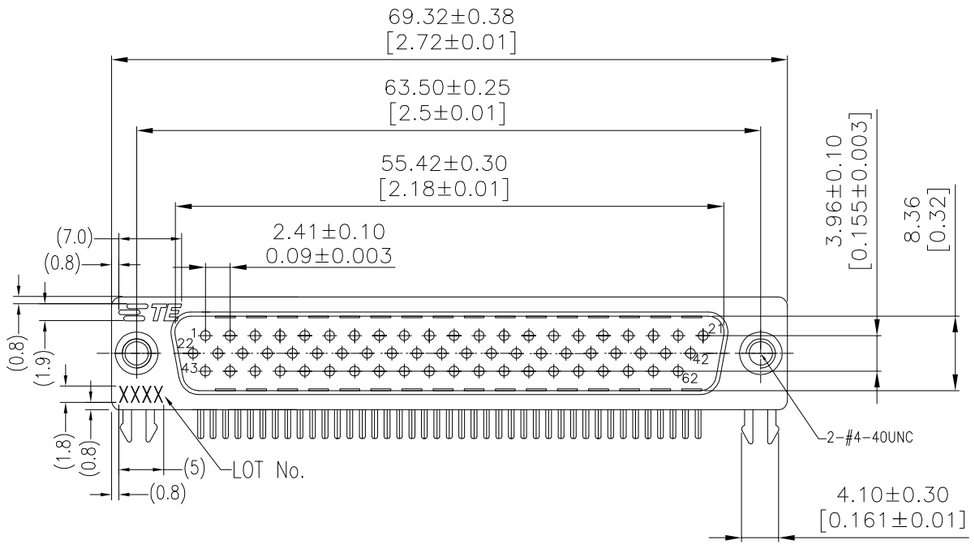

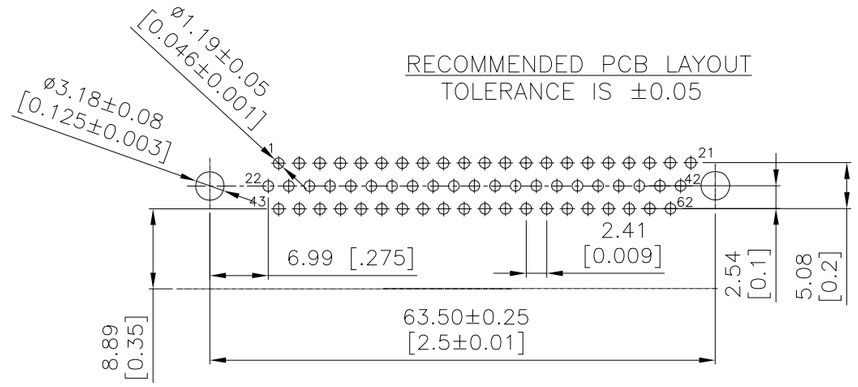

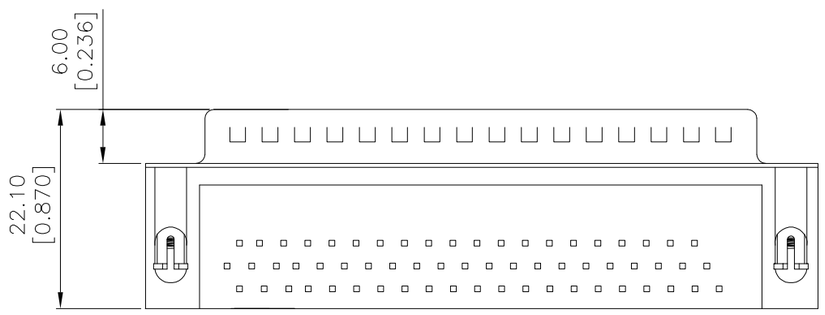

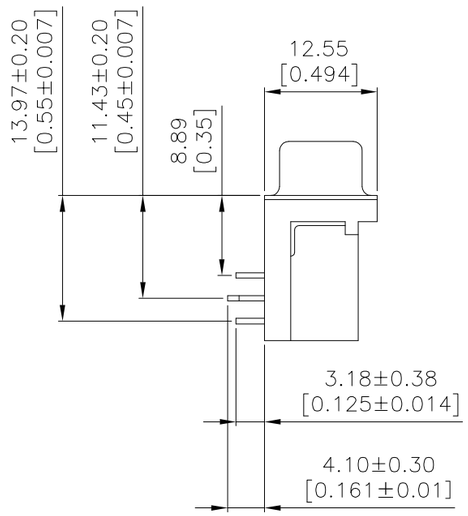

NOTES:

Housing:PBT+30%GF(UL94V-0) BLACK
Contact:Brass
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDERTAIL
50u" NICKEL UNDERPLATED OVERALL
Backdown:Brass,100u" TIN OVER 50u" NICKEL
Shell:Cold Roller Steel,Ni Plated
Revitlock:Brass,Nickel Plating

LOT NUMBER "XXXX"
- Stands For Calendar Year
- Stands For Week Number

THREADED	30µ"Au	2311773-1
-	Contact Area	P/N
	Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.25
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN AJITH PAI 10MAR2017
CHK DANIEL GORENC 10MAR2017
APVD DANIEL GORENC 10MAR2017
PRODUCT SPEC 108-130023
APPLICATION SPEC -
WEIGHT

TE Connectivity

NAME AMPLIMITE PLUG, HD22, RIGHT ANGLE, 62P,Threaded
-
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2311773	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV D