

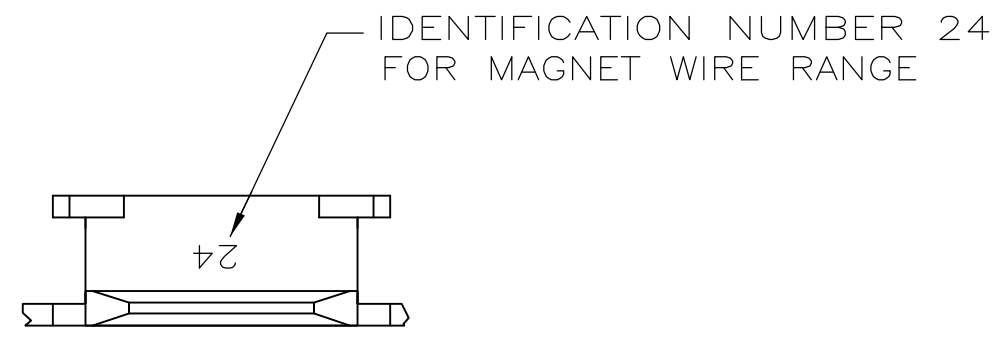
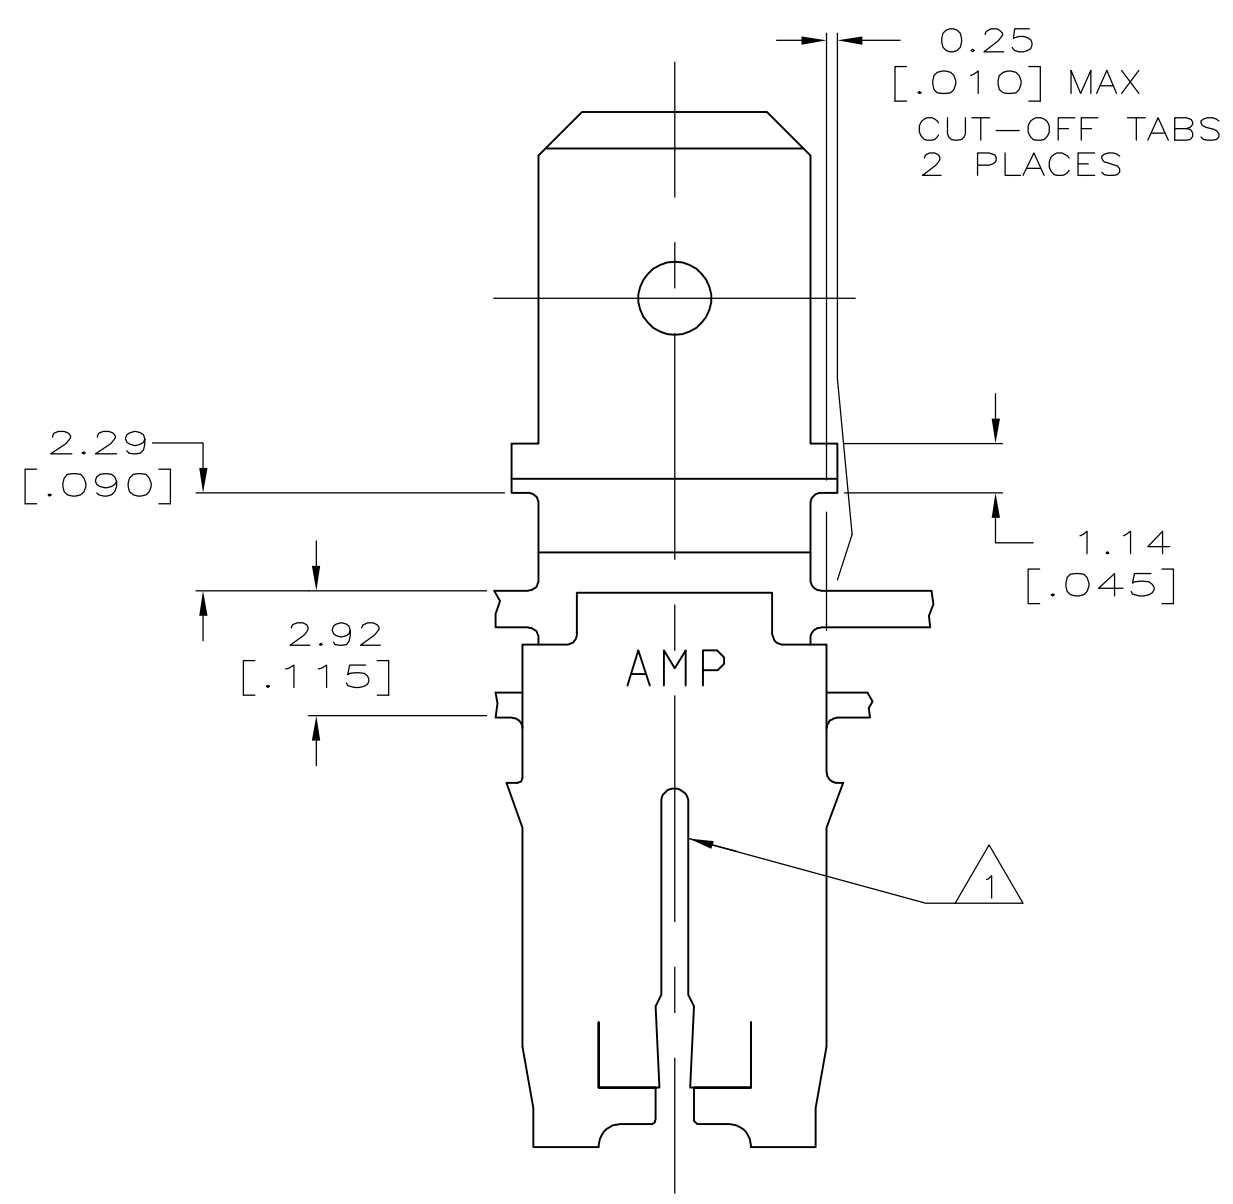


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	K	REVISED PER ECR-06-010427	01SEP06	HMR KR

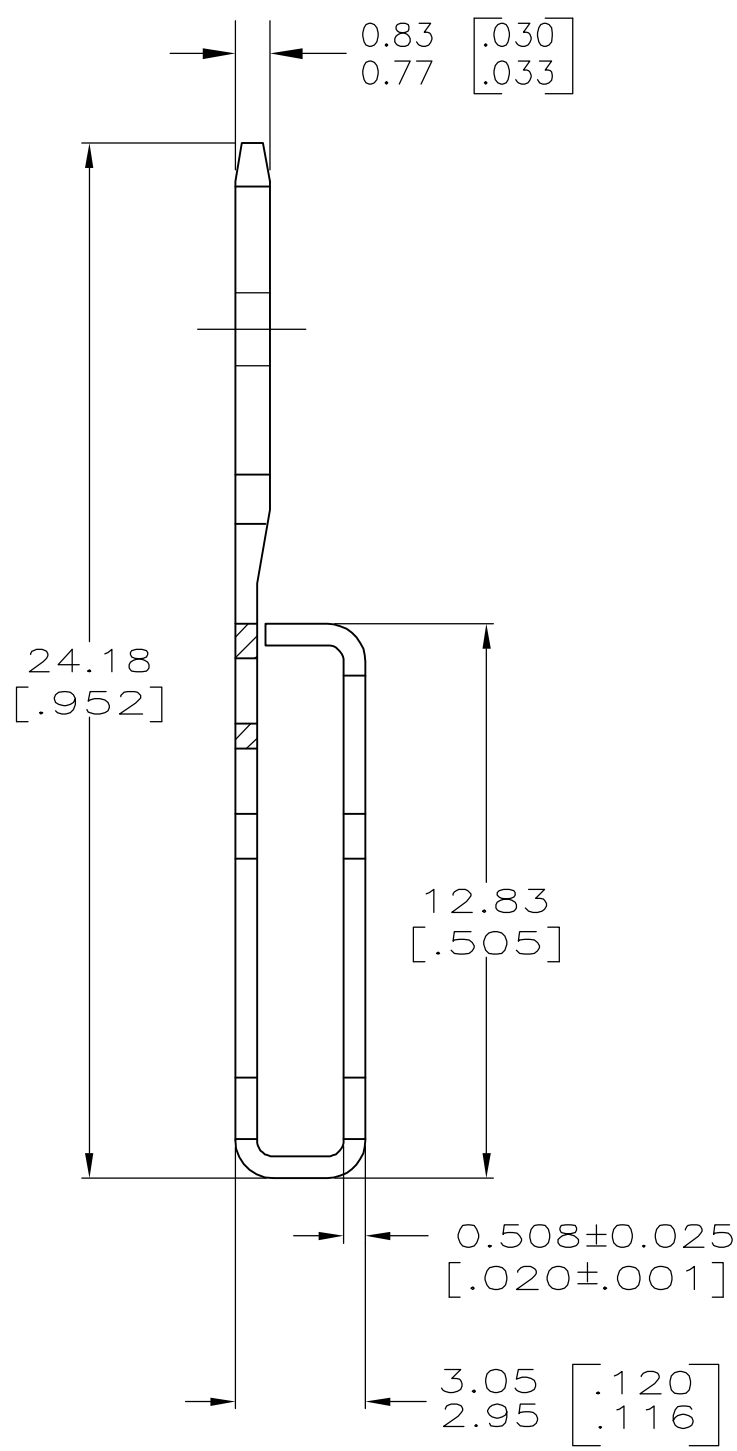

- 1 SLOT ACCEPTS 0.91-1.15mm [#19-#17] AWG COPPER MAGNET WIRE. 2 WIRES OF THE SAME SIZE MAX PER SLOT.
- 2 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 3 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38±0.08 [.330±.003] CENTERS.
- 4 VARNISH RESIST OVER 0.002032 [.000080] MIN TIN PER MIL-T-10727

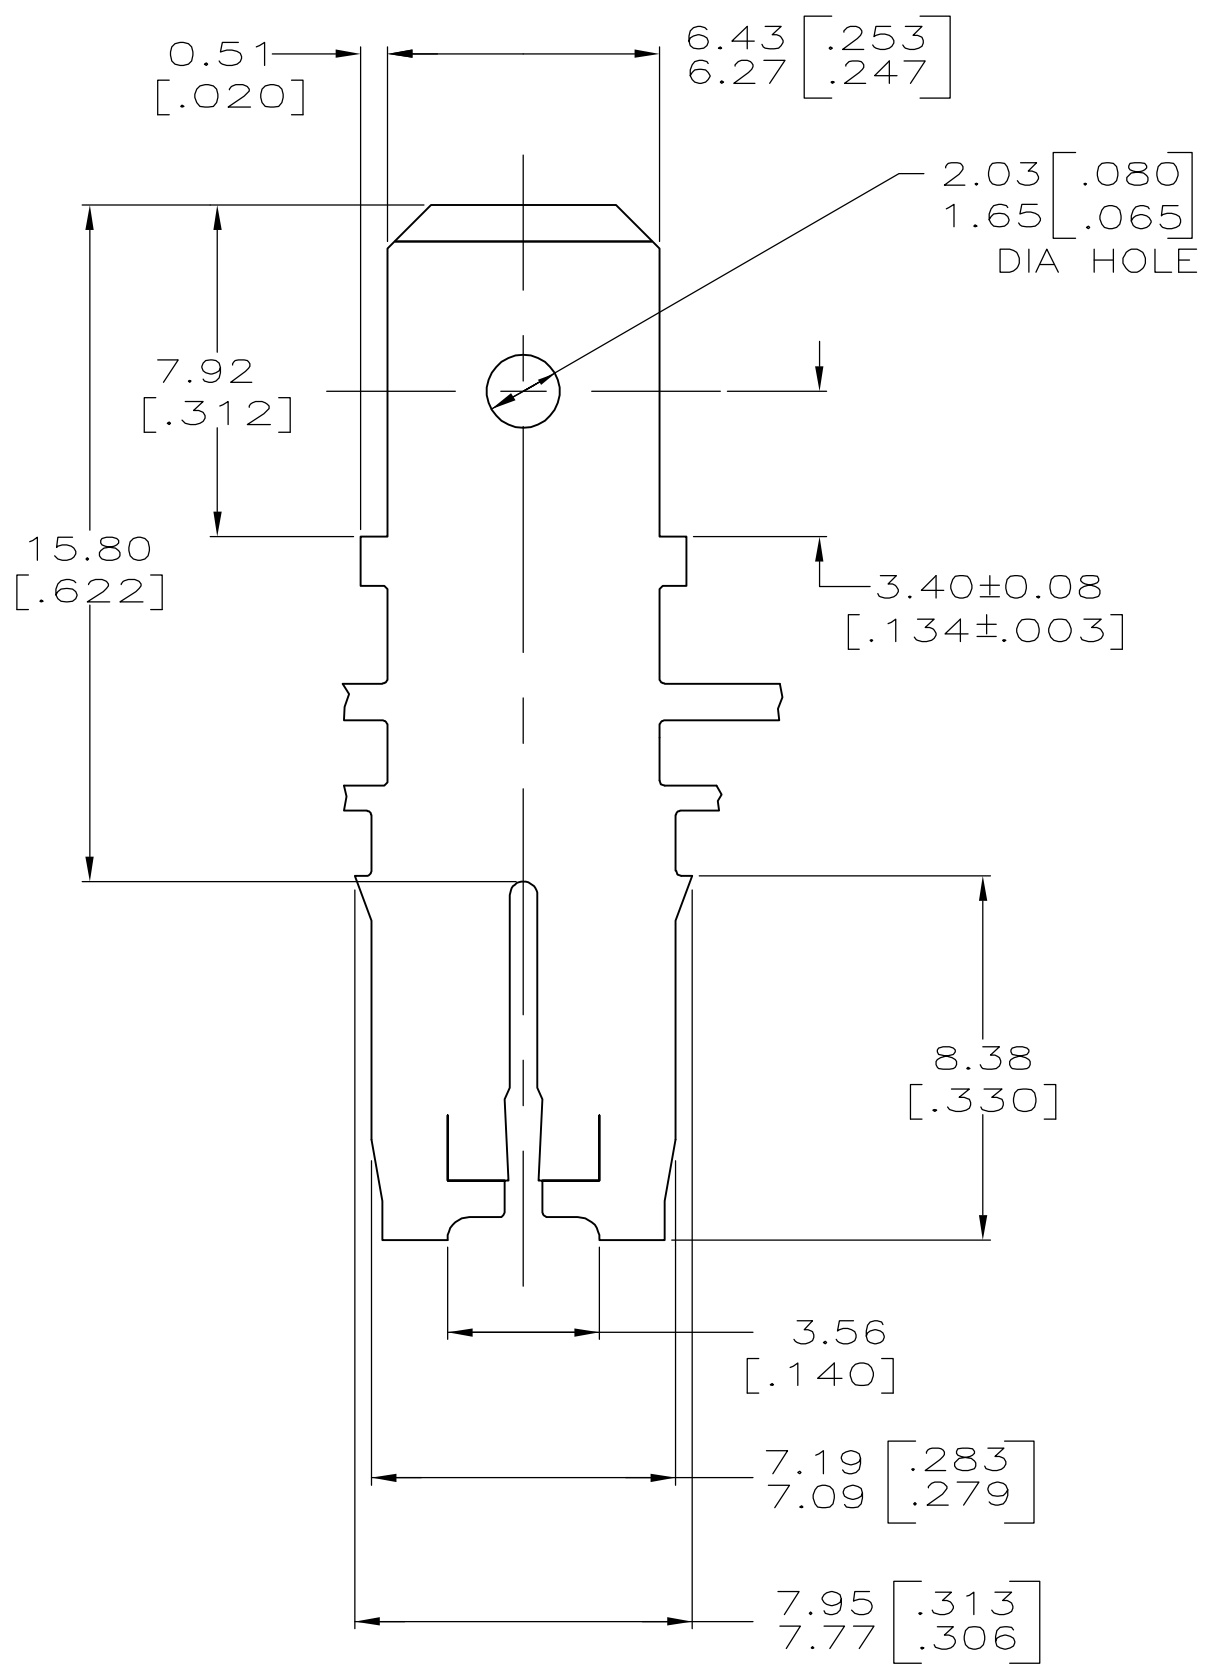

OBSOLETE	SPECIAL	4	63464-4
	STANDARD	4	63464-3
PART NO			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24/OCT/94 PHILLIP M. FORTNEY	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK 25/OCT/94 MICHAEL S. FEHER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 25/OCT/94 NELSON E. NEFF	NAME
0 PLC ± -		PRODUCT SPEC	TAB, 6.35 [.250] FASTON,™ MAG-MATE™
1 PLC ± -		108-2053	SIZE
2 PLC ± 0.25 [.010]		APPLICATION SPEC	CAGE CODE
3 PLC ± -		114-2066	DRAWING NO
4 PLC ± -		WEIGHT	RESTRICTED TO
ANGLES ± -		4M PRE-MILLED BRASS	FINISH
SEE TABLE		CUSTOMER DRAWING	SCALE
		6:1	SHEET
		1 of 1	REV
		K	