



SW2014



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release		SEE ECN# 013462	GRW	6/1/2016	KAC	6/1/2016

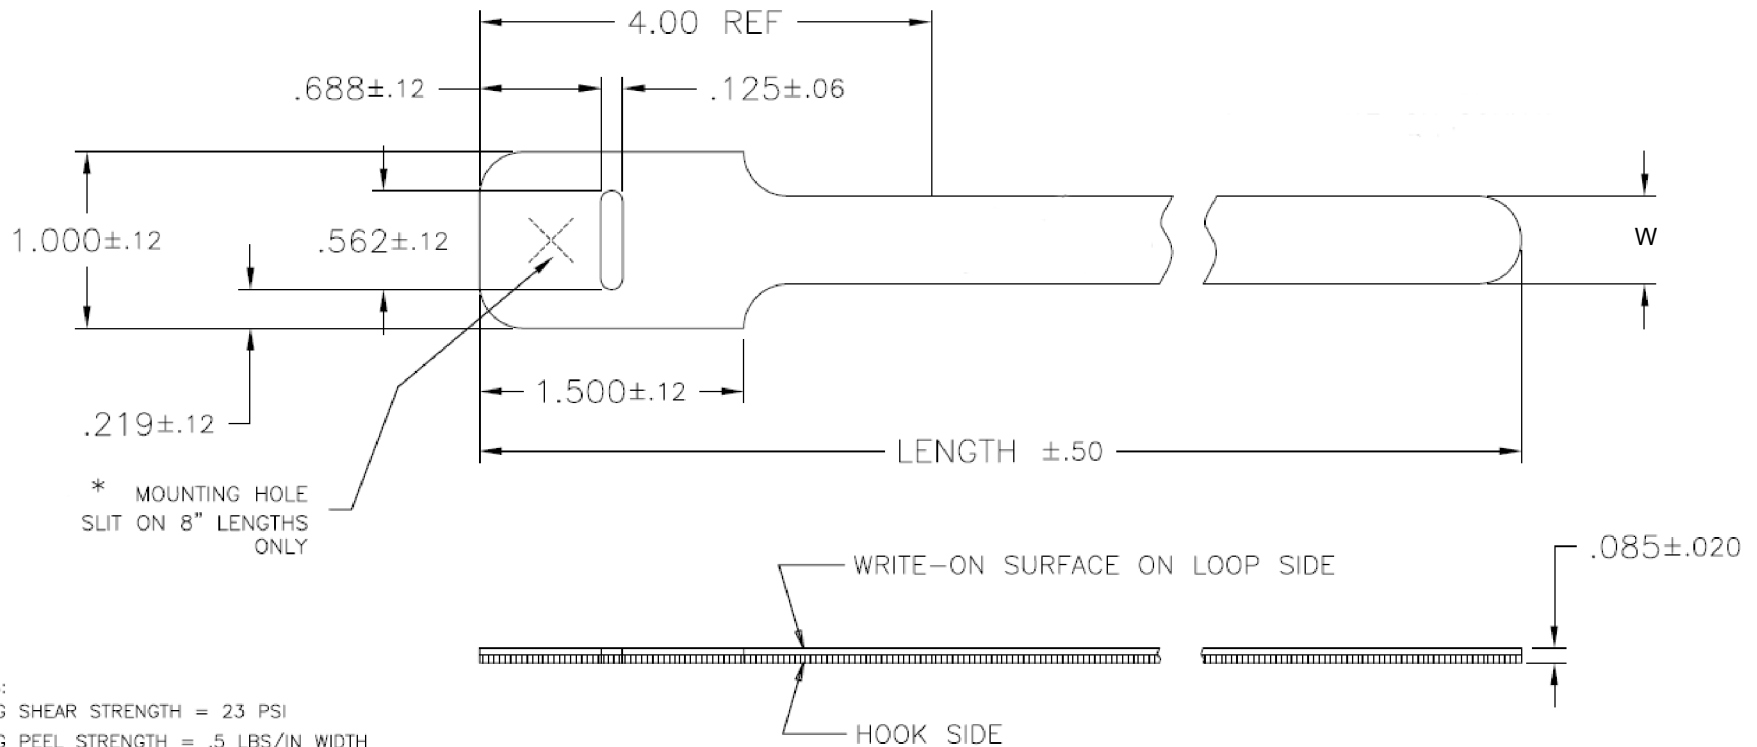

- NOTES:
1. AVG SHEAR STRENGTH = 23 PSI
 2. AVG PEEL STRENGTH = .5 LBS/IN WIDTH
 3. TENSILE LOOP & MAX BUNDLE DIA ARE BASED ON 2" MIN HOOK & LOOP ENGAGEMENT

Products Included in Package	W	Color	Length
GT.50X63	.5 +/- .12	Orange	6"
GT.50X64	.5 +/- .12	Yellow	6"
GT.50X86	.5 +/- .12	Blue	8"
GT.50X80	.5 +/- .12	Black	8"
GT.50X115	.5 +/- .12	Green	11"
GT.75X152	.75 +/- .12	Red	15"

Material
PE, PA66

Units: millimeters
Dimension without tolerances details to:
.XXX = ±.013
.XX = ±.13
.X = ±.3
None = ±.8
∠ = ±0.5°
Dimension Formatted mm/[in]

The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.

Drawn GRW 5/28/2016
Approved KAC 5/28/2016

HellermannTyton
North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No 854-44448 / GTASST
Title **GRIP TIE ASSORTMENT**
Drawing-No PRODUCTION : Phase
16-0381-001-CSU

Scale 1:1
Project Number PRP 16-0381
Format AH
Sheet 1/1