



| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
|                 |        |        |
| ON              | NONE   | ON     |
| 2-1             | N/A    | 2-3    |



- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERMINAL NUMBERS FOR REF ONLY
  - ▲4. PLATING MATERIAL: GOLD
  5. RATING: 0.4 (VA) MAX. @20V MAX.
  6. ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
  7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
  8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
  9. OPERATING TEMP.: -30°C to 85°C
  10. ▲ DENOTES CRITICAL PARAMETER.

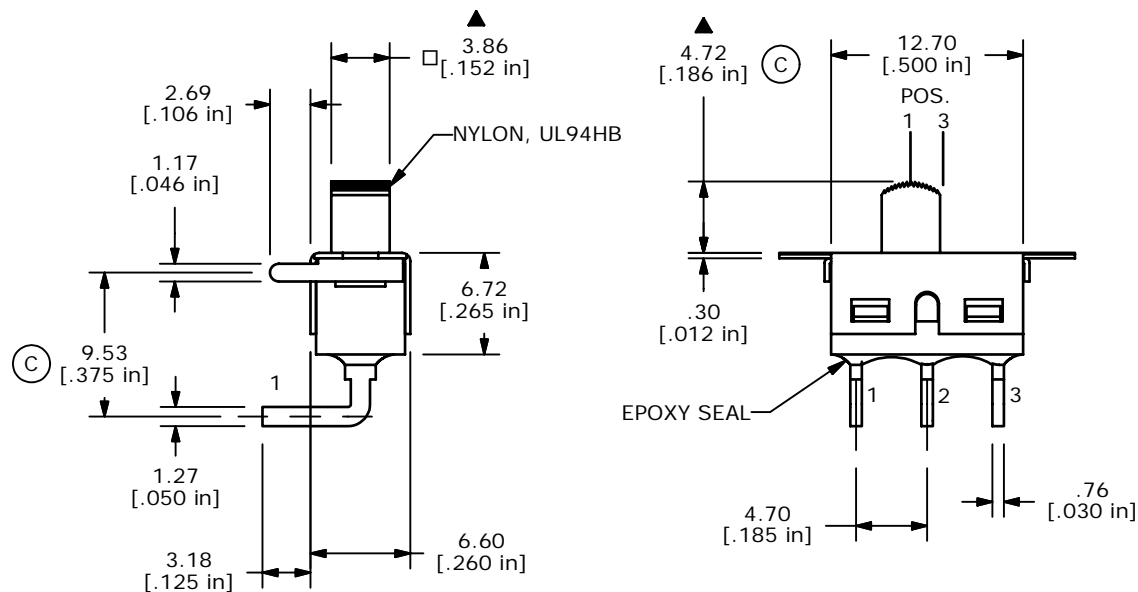

**E-SWITCH®**

|     |        |                        |         |    |
|-----|--------|------------------------|---------|----|
| C   | 15220  | CHANGES NOTED WITH (C) | 9/1/05  | PH |
| B   | 14927  | REVISED AND REDRAWN    | 5/25/05 | JB |
| REV | PCR NO | DESCRIPTION            | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|                      |                |        |             |       |
|----------------------|----------------|--------|-------------|-------|
| TITLE 500SSP1S1M6REB |                |        |             |       |
| SCALE 2:1            | DATE 1/15/2003 | DR CJB | DWG T511066 | REV C |