


## Specification Sheet

Part Number: 553-50009

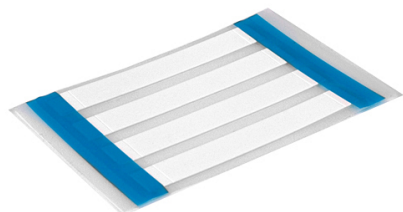

Heat Shrink Labels, Single Side, Unslit, .187" (4.74mm), PO-X, White, 250/box

**Article Number**

553-50009

**Type**

HST4.8-1.6WH

**Color**

White (WH)

**Features & Benefits**

- Slide Slit and optional center slits for easy wire insertion.
- Smooth surface for clean and legible printing.
- Supplied on a ladder style carrier so that markers can be kitted after printing.
- A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

**Quantity Per**

box

**Product Description**

HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

|                                       |   |
|---------------------------------------|---|
| <b>Short Description</b>              | Heat Shrink Labels, Single Side, Unslit, .187" (4.74mm), PO-X, White, 250/box |
| <b>Global Part Name</b>               | HST4.8-1.6WH-PO-X-WH  |
| <b>Variant</b>                        | Thin-Wall   |
| <b>Width W (Imperial)</b>             | 1.9   |
| <b>Width W (Metric)</b>               | 48.26   |
| <b>Thickness T (Imperial)</b>         | .003  |
| <b>Thickness T (Metric)</b>           | .0762   |
| <b>Height H (Imperial)</b>            | 0.312   |
| <b>Height H (Metric)</b>              | 7.92  |
| <b>Width of Liner (Metric)</b>        | 76.2  |
| <b>Width of Liner (imperial)</b>      | 3.0   |
| <b>Outside Diameter OD(Imperial)</b>  | 0.187   |
| <b>Outside Diameter OD(metric)</b>    | 4.74  |
| <b>Outside Diameter Max(Imperial)</b> | 0.187   |
| <b>Outside Diameter Max (metric)</b>  | 4.74  |
| <b>Wall Thickness WT (Imperial)</b>   | 0.026   |
| <b>Wall Thickness WT (Metric)</b>     | 0.66  |

|                 |                                 |
|-----------------|---------------------------------|
| <b>Material</b> | Polyolefin, cross-linked (PO-X) |
|-----------------|---------------------------------|

**Material Shortcut** PO-X

|                    |             |
|--------------------|-------------|
| <b>US MIL SPEC</b> | SAE-AS81531 |
|--------------------|-------------|

MIL-STD-202G Method 215K  
AMS-DTL-23053/5 Class 1 and 3

**Flammability**

UL 224 VW-1

**Halogen free**

No

**Operating Temperature (Metric)**

-67°F to +275°F (-55°C to +135°C)

**Reach Complaint(Article 33)**

Yes

**ROHS Complaint**

Yes

**Certification/Specification WEB**

UL 224 125 °C 600V VW-1 SAE - AS81531 SAE - AMS - DTL-23053/5 Class  
1 and 3

|                                   |     |
|-----------------------------------|-----|
| <b>Package Quantity(Imperial)</b> | 250 |
|-----------------------------------|-----|

**Package Quantity (Metric)** 250

|                       |            |
|-----------------------|------------|
| <b>Customs Number</b> | 3926909987 |
|-----------------------|------------|

**Content Unit(BMEcat)** pack

|                          |       |
|--------------------------|-------|
| <b>Labels per Column</b> | 1     |
| <b>Labels per Row</b>    | 1     |
| <b>Weight (Metric)</b>   | 0.317 |
| <b>Weight (Imperial)</b> | 0.68  |