
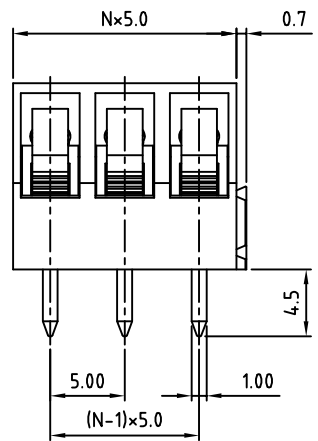




SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



N= Number of poles

P.C.B LAYOUT

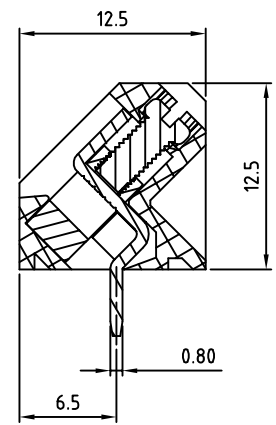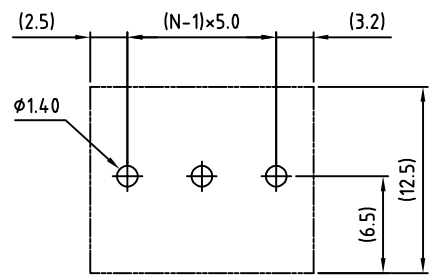

Material

- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: RoHS Compliant

PART NUMBER:

OSTTGXX0160B

- | | |
|--------------|--------------------|
| No. of Poles | COLOR |
| 02: 02 Poles | 0: Black |
| 03: 03 Poles | 5: Green |
| ... | 6: Blue (Standard) |
| 24: 24 Poles | 8: Grey |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTTG 5.0mm Series Long Interlock		
PART NO.	OSTTGXX0160B	DWG NO.	OSTTGXX0160B.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
Shi Jun 2006.10.20	Shi Jun 2006.10.20	Shi Jun 2006.10.20	Shi Jun 2006.10.20	
				UNIT: mm SCALE: NONE SHEET: 01/01 REV.: D
				Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*