
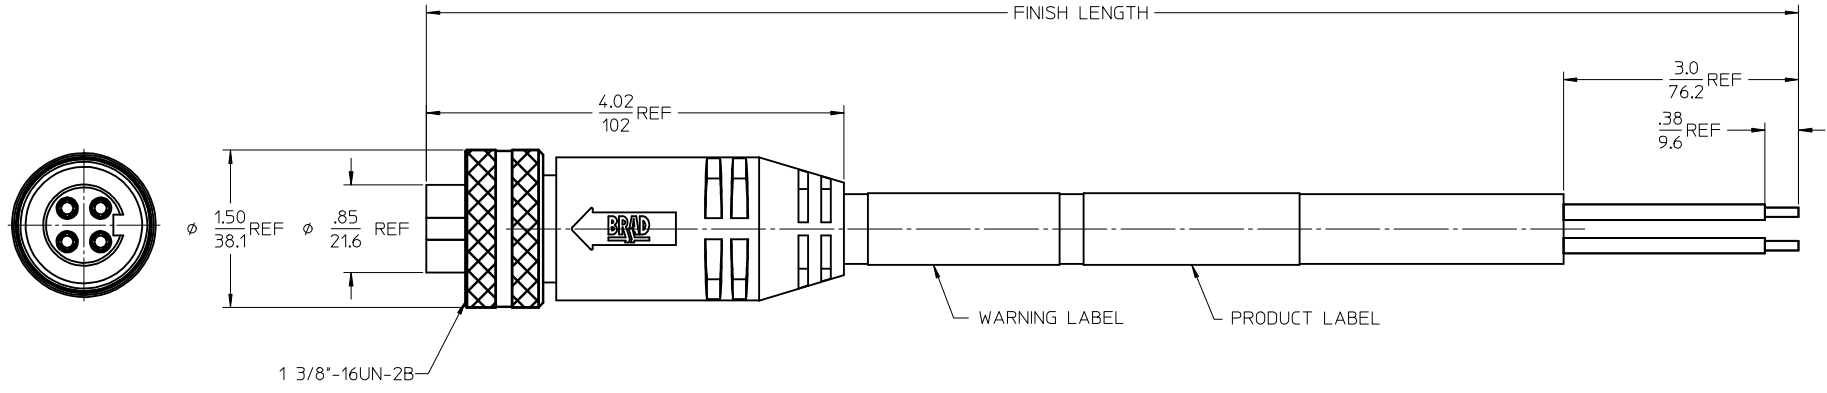


POLES	MATERIAL NO.	ENG. NO.	LENGTH
3	1300630003	C03000A48M020	2M +89-0MM (6'7"+3.50-0)
4	1300630089	C04000A48M020	2M +89-0MM (6'7"+3.50-0)

FACE VIEW-FEMALE INSERT

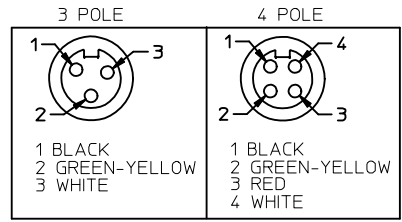

SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & STOOO
ELECTRICAL: 600V AC/DC 32 AMPS

UPDATED DRAWING EC NO: IPG2014-1095 DRAWINGGUSTAFSON 2015/09/01 CHKD:VOU 2015/11/12 APPR: JFMURPHY 2015/09/16	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2°	mm INCH DRAWN BY DATE B.RUPERT 01/12/10 CHECKED BY DATE B.WOODMAN 01/12/10 APPROVED BY DATE JFMURPHY 2010/01/15	TITLE QUICK CHANGE FEMALE STRAIGHT 3 & 4 POLE AS PORTABLES			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	MOLEX INCORPORATED		DOCUMENT NO. SD-130063-089	SHEET NO. 1 OF 1		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							