


**S-PT-1X2-24DC-1/2"**

Order No.: 2882569

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2882569>

Surge protection in the IP67 screw-on module for measuring sensors, direct mounting with 1/2" NPT outer thread, cable screw connection for the signal cable, two-stage protective circuit.

Commercial data	
GTIN (EAN)	 4 046356 091657
Note	Made-to-order
sales group	J330
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 252 (NTK-2006)

## Product notes

WEEE/RoHS-compliant since:  
05/31/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

## General

Housing material	Zinc die-cast, surface bronzed and nickel-plated
Color	silver
Standards for air and creepage distances	IEC 60664-1: 1992-10 VDE 0110-1

Total surge current (8/20) $\mu$ s	20 kA
Total surge current (10/350) $\mu$ s	2 kA
Ambient temperature (operation)	-40 °C ... 85 °C
Mounting type	Direct screw connection
Design	Screw-in module
Number of positions	3
Degree of protection	IP67
Direction of action	Line-Line & Line-Earth Ground
Width	34.00 mm
Height	148.00 mm
Length	34.00 mm

**Protective circuit**

IEC category	C1
	C2
	C3
	D1
Nominal voltage $U_N$	24 V DC
Maximum continuous operating voltage $U_C$	40 V DC
	28 V AC
Maximum continuous voltage $U_C$ (wire-wire)	40 V DC
	28 V AC
Nominal current $I_N$	450 mA (55°C)
Operating effective current $I_C$ at $U_C$	$\leq 10 \mu$ A
Ground conductor current $I_{PE}$	$\leq 2 \mu$ A
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Core)	10 kA
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Earth)	10 kA
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Shield-Earth)	10 kA (optional)
Total surge current (8/20) $\mu$ s	20 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu$ s maximum (Core-Core)	10 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu$ s maximum (Core-Earth)	10 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu$ s maximum (Shield-Earth)	10 kA

Nominal pulse current $I_{an}$ (10/1000) $\mu$ s (Core-Core)	23 A
Nominal pulse current $I_{an}$ (10/1000) $\mu$ s (Core-Earth)	100 A
Nominal pulse current $I_{an}$ (10/1000) $\mu$ s (Shield-Earth)	100 A
Lightning test current (10/350) $\mu$ s, peak value $I_{imp}$	1 kA
Output voltage limitation at 1 kV/ $\mu$ s (Core-Core) spike	$\leq 55$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) spike	$\leq 450$ V (Direct grounding)
Output voltage limitation at 1 kV/ $\mu$ s (Shield-Earth) spike	$\leq 600$ V (optional)
Output voltage limitation at 1 kV/ $\mu$ s (Core-Core) static	$\leq 55$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) static	$\leq 450$ V (Direct grounding)
Residual voltage at $I_n$ , (conductor-conductor)	$\leq 55$ V
Residual voltage with $I_{an}$ (10/1000) $\mu$ s (conductor-conductor)	$\leq 65$ V
Protection level $U_p$ (Core-Core)	$\leq 80$ V (C2 -5 kA)
Protection level $U_p$ (Core-Earth)	$\leq 450$ V (C2 -5 kA, direct grounding)
Protection level $U_p$ (Shield-Earth)	$\leq 600$ V (C2 -5 kA optional)
Response time $t_A$ (Core-Core)	$\leq 1$ ns
Response time $t_A$ (Core-Earth)	$\leq 100$ ns
Response time $t_A$ (Shield-Earth)	$\leq 100$ ns
Input attenuation $a_E$ , sym.	Typ. 0.5 dB ( $\leq 1.5$ MHz / 50 $\Omega$ ) Typ. 0.2 dB ( $\leq 300$ kHz / 150 $\Omega$ )
Cut-off frequency $f_g$ (3 dB), sym. in 50 Ohm system	Typ. 6 MHz
Cut-off frequency $f_g$ (3 dB), sym. in 150 Ohm system	Typ. 2 MHz
Resistance in series	2.2 $\Omega$
Max. required back-up fuse	500 mA (e.g. T in acc. with IEC 127-2/III)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Shield-Earth)	C2 (10 kV/5 kA)

**Connection data**

Connection name	Input/output
Type of connection	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Connection line
Connection method	Screw connection
Screw thread	M3
Tightening torque	0.6 Nm
Stripping length	6 mm
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16

**Connection, protective circuit**

Standards/regulations	IEC 61643-21
-----------------------	--------------

**Certificates / Approvals**




Certification

GOST


**Diagrams/Drawings**

Dimensioned drawing

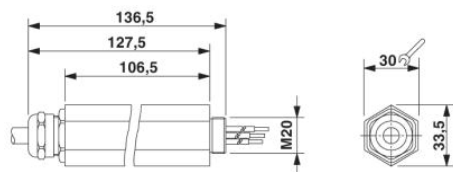

Circuit diagram

---

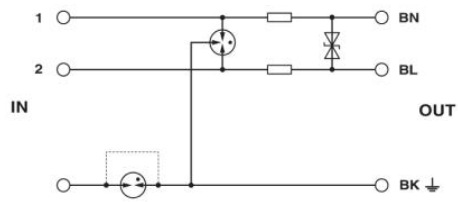

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;