


- ① HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER ASTM D5138 LCP000 G30A 32250, COLOR: NATURAL.
- ② CONTACT MATERIAL: PHOSPHOR BRONZE.
- ③ CONTACT FINISH:
 UNDERPLATE (ENTIRE CONTACT):
 0.00127 MIN NICKEL.
 ON MATING SURFACES:
 CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA UNCONTROLLED ENVIRONMENT.
 ON LEADS
 0.0006 MIN TIN-LEAD OVER UNDERPLATE.
 LUBRICATION (ENTIRE CONTACT):
 SURFACE CONDITIONER PER AMP SPEC 112-1002 AFTER PLATING.
- ④ PART MARKING PER AMP INCORPORATED SPECIFICATION 115-9009, LOCATED APPROXIMATELY AS SHOWN.
- ⑤ DIMENSION APPLIES WHEN SEATED ON PRINTED CIRCUIT BOARD.

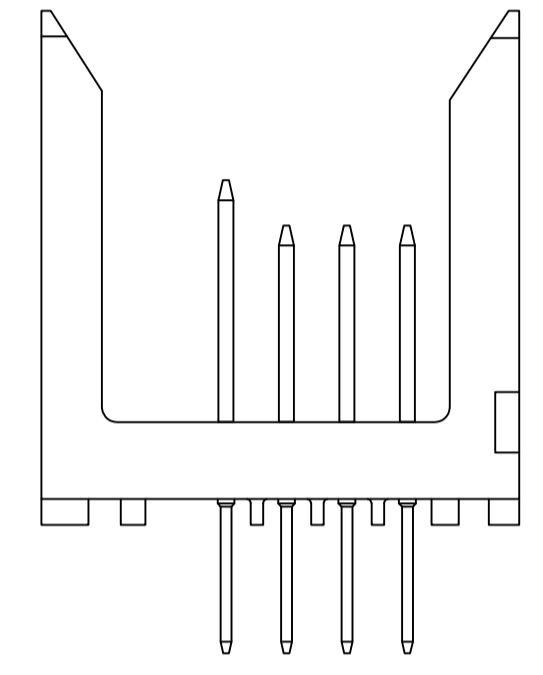

CODE LETTER	⑤ MATING POST LENGTH ±0.10	LEAD LENGTH (REF)
T	8	4.25
J	6.5	4.25

ROW	D	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J
	C	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J
	B	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J
	A	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	1	2	3																X	
	SIGNAL			SIGNAL			SIGNAL			SIGNAL										
	POSITION																			

OBSOLETE	③	18	536540-6
OBSOLETE	③	42	536540-5
OBSOLETE	③	48	536540-4
	③	24	536540-3
OBSOLETE	③	12	536540-2
	③	6	536540-1
	FINISH	POSN X	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0. PLC ± -
 1. PLC ± -
 2. PLC ± -0.13
 3. PLC ± -
 4. PLC ± -
 ANGLES ± -

MATERIAL: FINISH:

THIS DRAWING IS A CONTROLLED DOCUMENT. **STE** TE Connectivity
 NAME: ASSEMBLY, PIN, SIGNAL, VERTICAL, Z-PACK 2mm FB PRESS FIT LEADS, SEQUENCED BY ROW
 SIZE: A1 CAGE CODE: 00779 DRAWING NO: 536540
 WEIGHT: -- SCALE: 4:1 SHEET 1 OF 2 REV R

