




PCB Layout, component side (thickness 1.6 mm min.)

Max. Temperature : 260° during 10 seconds

				Mod.	Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Low Profile Male 9p with die casted grounds and 4-40 UNC unremovable screwlocks	Maßstab/ Scale				
						Detail.			28Aug2009	ED	1,5:1		
						Insp.							
						Stand.							
09551663820.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors) see page 2/2	EC01215	14Jan2010	ED		TB 09 55 166 x820	Blatt/ Page 1 / 2			
09551666820.741	2										HARTING EURL F-95972 Paris		
09551667820.741	3												
Part number	PL	Thread	Index designation		Mod.	Dot.	Name		Sub.				

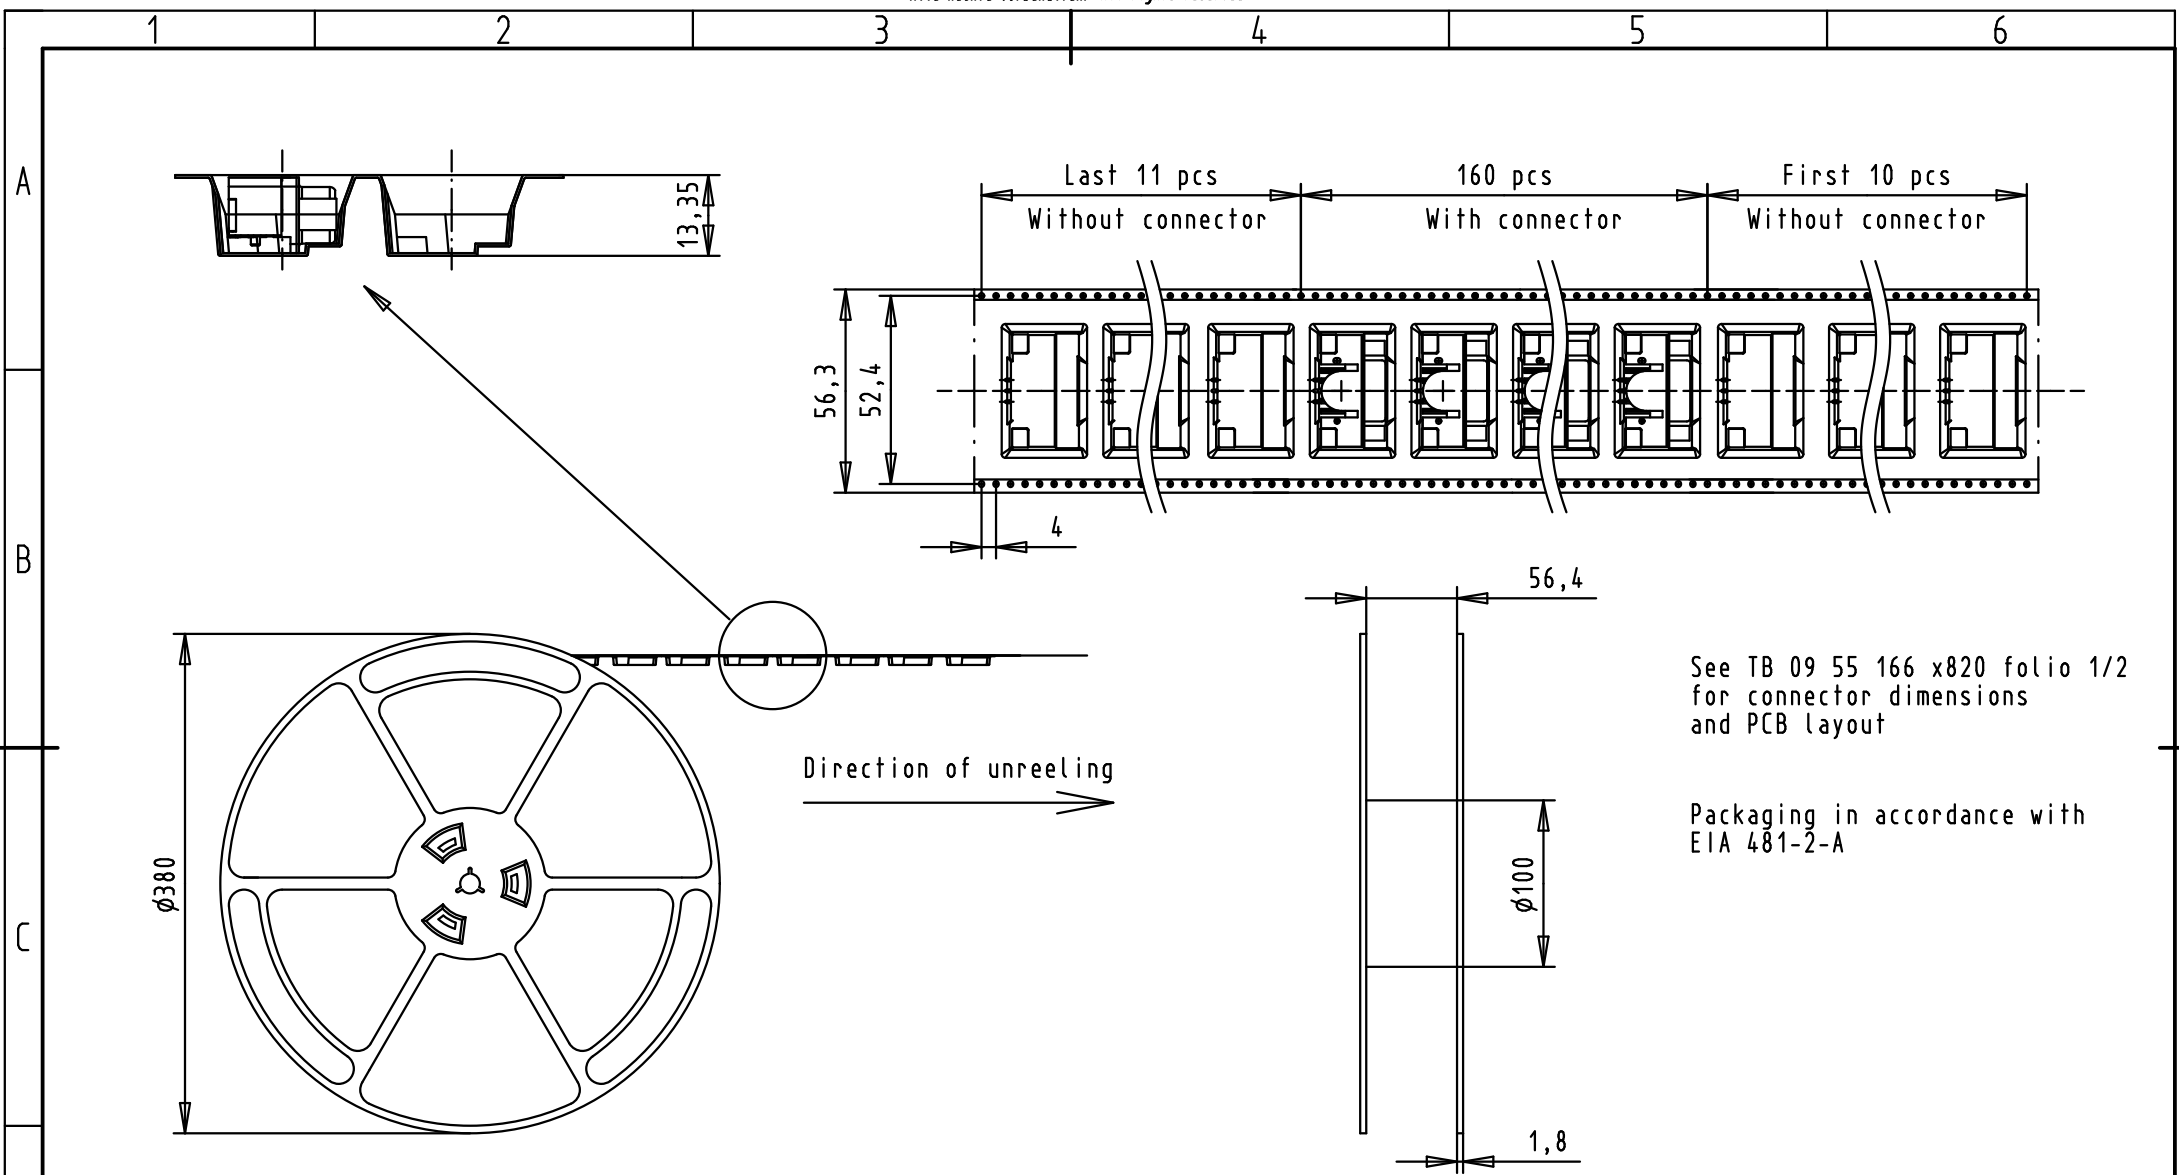

See TB 09 55 166 x820 folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

							Dat. Name Detail. 28Aug2009 ED		All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Low Profile Male 9p with die casted grounds and 4-40 UNC unremovable screwlocks	Maßstab/ Scale	
							Insp.					
							Stand.					
09551663820.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors)	EC01215	14Jan2010	ED	HARTING EURL F-95972 Paris			TB 09 55 166 x820	Blatt/ Page 2 / 2
09551666820.741	2				EC01118	26Nov2009	LP					
09551667820.741	3				EC00775	28Aug2009	ED					
Part number	PL	Thread	Index designation		Mod.	Dat.	Name	Sub.				