



Board-mounted heat dissipators

- These compact, high-performance heat dissipators have exceptional volume/thermal efficiency ratios, making them especially effective where board space is limited and power levels are high.
- A wide range of hole patterns is available for single and multiple semiconductor mounting.
- Various finger heights in the LA, LB and UP Series optimize power dissipation, permit tailoring the heat dissipator to match vertical height requirements.

LB-B1 Series

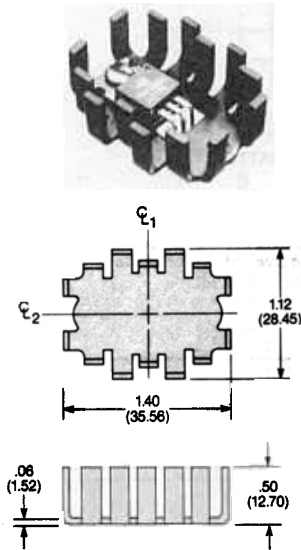

Dimensions are for reference use only. Contact IERC for dimensions with tolerances or standard part drawings.

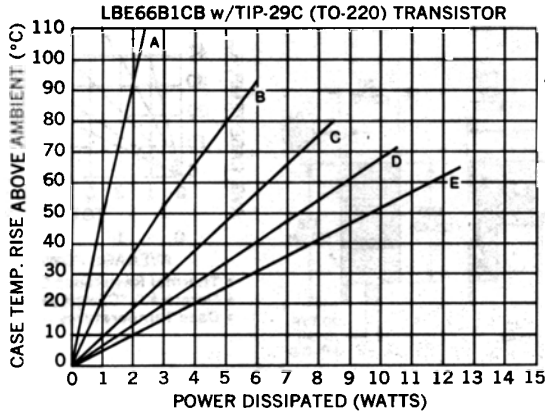

- DESCRIPTION OF CURVES
- A. N.C. Horiz. Device Only Mounted to G-10.
 - B. N.C. Horiz. & Vert. With Dissipator.
 - C. 200 FPM w/Diss.
 - D. 500 FPM w/Diss.
 - E. 1000 FPM w/Diss.


- Thermal Resistance Case to Sink is 0.9-1.1 °C/W w/Joint Compound.
- Derate 0.4 °C/watt for unplated part in natural convection only.
- Derate 3.0 °C/watt for Insulube® part in natural convection only.

Ordering Information


IERC PART NO.				Semiconductor Accommodated	Hole patt. ref. no. (see pg. 2-27)	Max. Weight (Grams)
Unplated	Comm'l. Black Anodize	Mil. Black Anodize	Insulube® 448			
LB66B1-76U	LB66B1-76CB	LB66B2-76B	LB66B1-76	Undrilled	—	6.2
LBE66B1U	LBE66B1CB	LBE66B1B	LBE66B1	TO-126, TO-220	1	6.2

Note: See page iv for other finishes.

LB-B2 Series

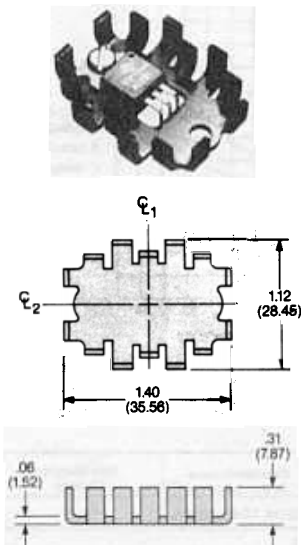

Dimensions are for reference use only. Contact IERC for dimensions with tolerances or standard part drawings.

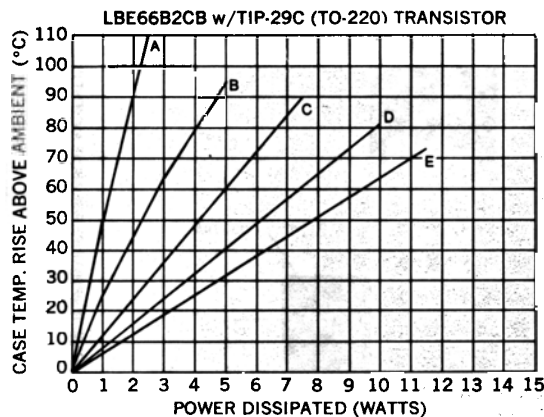

- DESCRIPTION OF CURVES
- A. N.C. Horiz. Device Only Mounted to G-10.
 - B. N.C. Horiz. & Vert. With Dissipator.
 - C. 200 FPM w/Diss.
 - D. 500 FPM w/Diss.
 - E. 1000 FPM w/Diss.

- Thermal Resistance Case to Sink is 0.9-1.1 °C/W w/Joint Compound.
- Derate 0.4 °C/watt for unplated part in natural convection only.
- Derate 3.0 °C/watt for Insulube® part in natural convection only.

Ordering Information

IERC PART NO.				Semiconductor Accommodated	Hole patt. ref. no. (see pg. 2-27)	Max. Weight (Grams)
Unplated	Comm'l. Black Anodize	Mil. Black Anodize	Insulube® 448			
LB66B2-76U	LB66B2-76CB	LB66B2-76B	LB66B2-76	Undrilled	—	4.8
LBE66B2U	LBE66B2CB	LBE66B2B	LBE66B2	TO-126, TO-220	1	4.8

Note: See page iv for other finishes.