


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

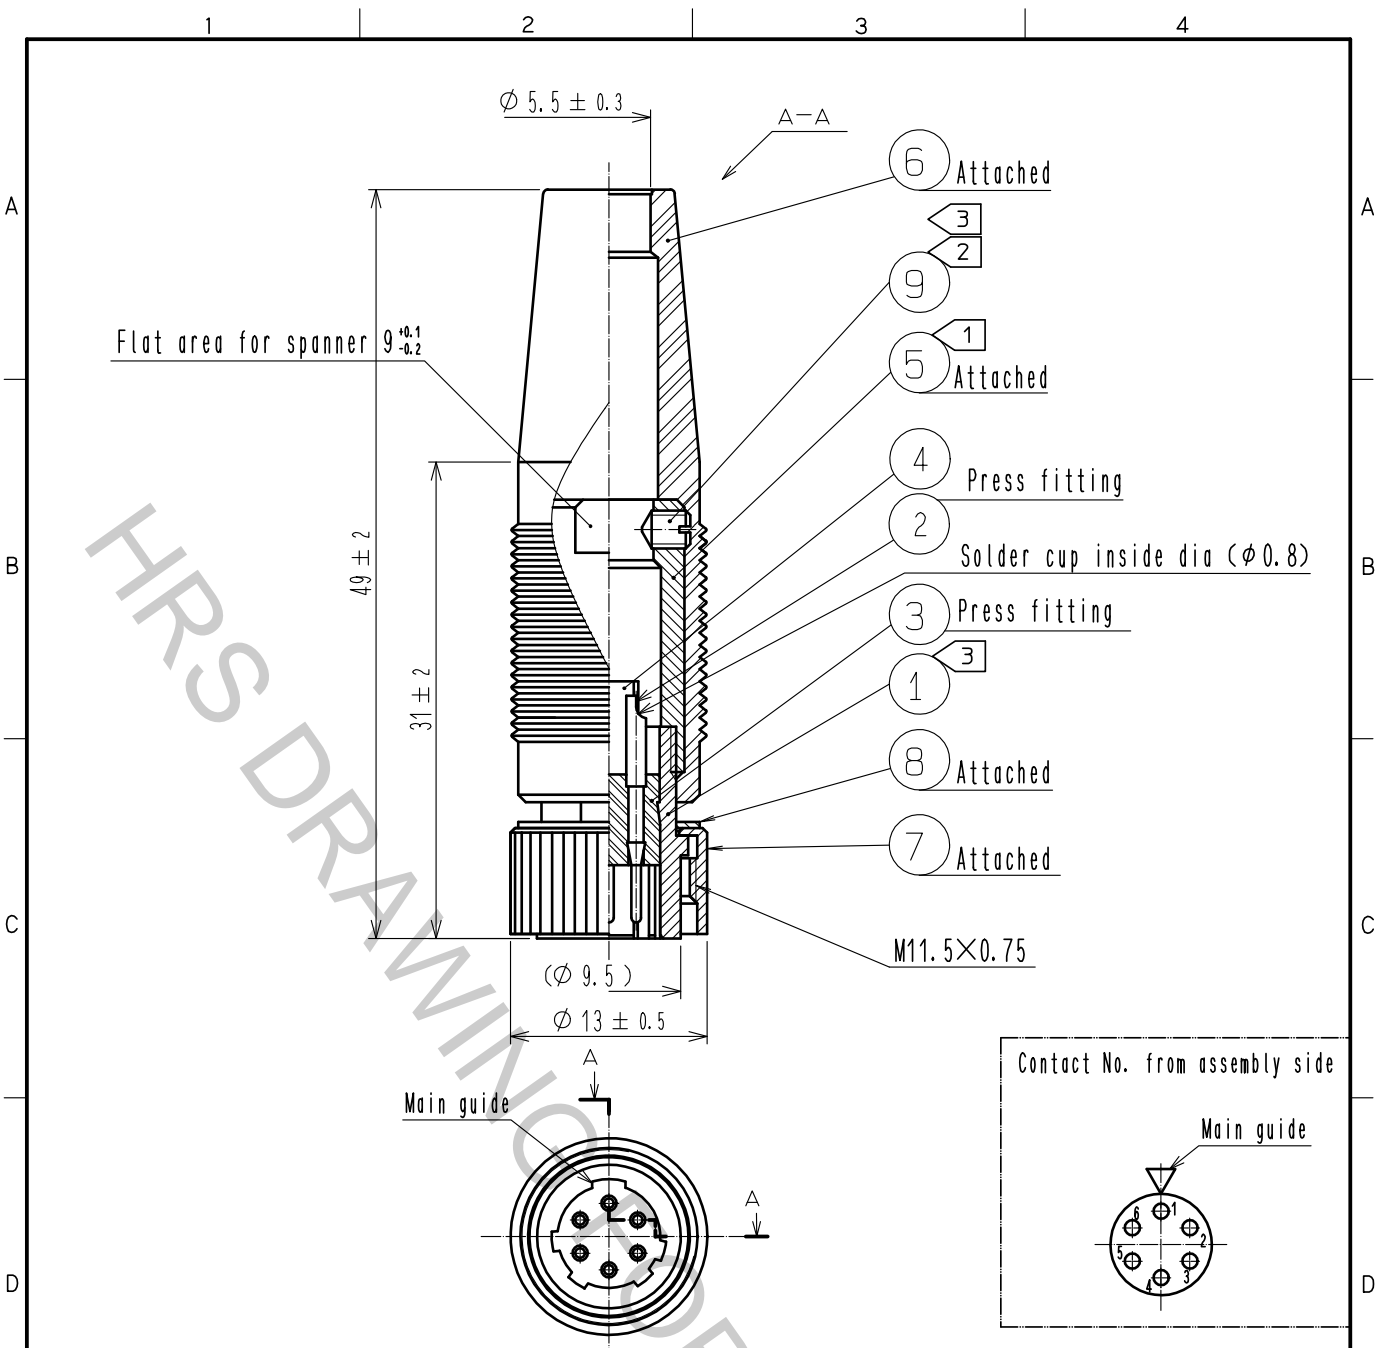

- Notes:
- ① The recommended clamp torque of ref. No. ⑤: 1.5 N · m.
 - ② The recommended clamp torque of ref. No. ⑨: 0.1 to 0.15 N · m.
 - ③ LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ① and No. ⑨ from loosening.
 - ④ Rotation examples of ref. No. ① and No. ⑤ are shown.
 - ⑤ Applicable crimping: SR30-PCCL103-0266-5-00, separately.
 - ⑥ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure. Please confirm before the use.

5	Brass	Nickel plating			
4	Polytetrafluoroethylene	(White)	9	Steel	Chromate treatment (Trivalent chromium) JIS B 1117 M2.5X0.45X3
3	Polyacetal	(White)	8	Brass	Chrome plating
2	Brass	Surface plating : Gold plating 0.2µm min. Under plating : Nickel plating 3µm min.	7	Brass	Chrome plating
1	Zinc alloy	Nickel plating	6	Chloroprene rubber	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm	SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.	APPROVED	·HY. KOBAYASHI	18.02.22	DRAWING NO.	EDC-020857-31-00	
	CHECKED	·HY. KOBAYASHI	18.02.22	PART NO.	SR30-10PX-6P(31)	
	DESIGNED	·TH. KAMEYA	18.02.21	CODE NO.	CL103-0336-9-31	1/1
	DRAWN	·MK. INOUE	18.02.06			