
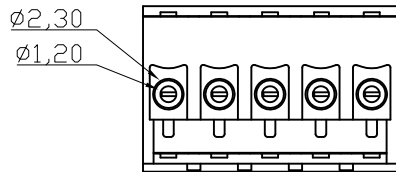
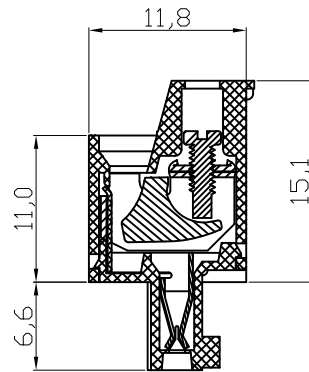


N= NUMBER OF CONTACTS

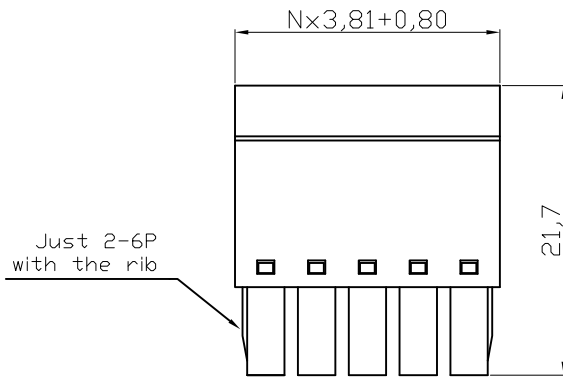

Material

Clamp: Steel Zinc plating
 Terminal screw: Steel Zinc plating"-slot type
 Female contact: PhBz tin plated
 Terminal (Up body): Thermoplastic (UL94V-0),Green
 Terminal (Down body): Thermoplastic (UL94V-0),Green
 Clampcage: Steel Zinc plated

Electrical cULus

Voltage rating: 300VAC
 Current rating: 10A
 Wire range:
 Solid wire(AWG): 16-28
 Stranded wire (AWG): 16-28
 Torque: 1.7Lb-In.
 Screw: M2
 Wire strip length: 6-7mm
 Withstanding Voltage: 1.6KV
 Operating temperature: -40°C to +115°C
 Safety Approval:

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	10.12.2009	Dean	ASSMANN WSW-No. A-TB381-VMxx
X.	±0.50					Approved	27.08.2010	Hellwig	
X.X	±0.30								
X.XX	±0.10								
DIM	TOL	②	Update	27.08.2010	Rale			Drawing-No.	ASS 3847 CO rev02
X.°	±1°	①	Drawn	10.12.2009	Dean				
Angle	TOL	Id.	Modification	Date	Name				