

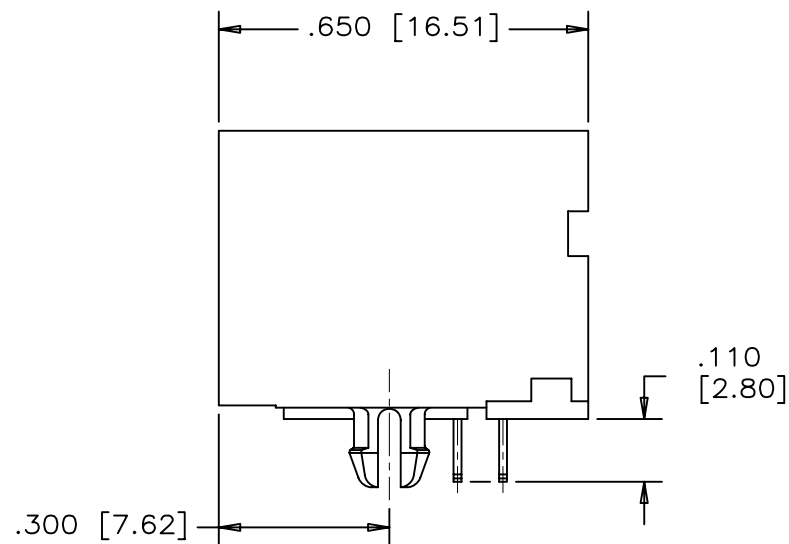


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	Mar.29/06	L.CHAN

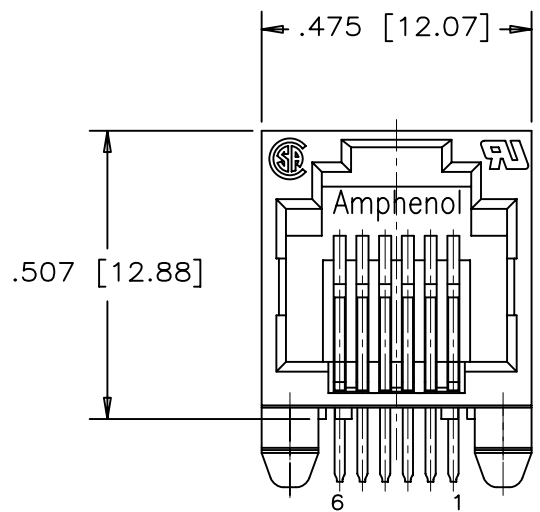


MATERIALS:

- PLASTIC HOUSING: HIGH TEMPERATURE RESISTANT NYLON
UL FLAMMABILITY RATING 94V-0.
INFRA-RED OVEN COMPATIBLE
- CONTACTS: PHOSPHOR BRONZE
- CONTACT PLATING: 50 MICROINCHES [1.27 MICRONS] MINIMUM NICKEL.
50 MICROINCHES [1.27 MICRONS] MINIMUM GOLD
ON MATING SURFACES
100 MICROINCHES [2.54 MICRONS] MATTE TIN
ON CONTACT TAILS.
- RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING OR REFLOW SOLDERING AT 260°C
MAXIMUM FOR 5 SEC MAXIMUM.

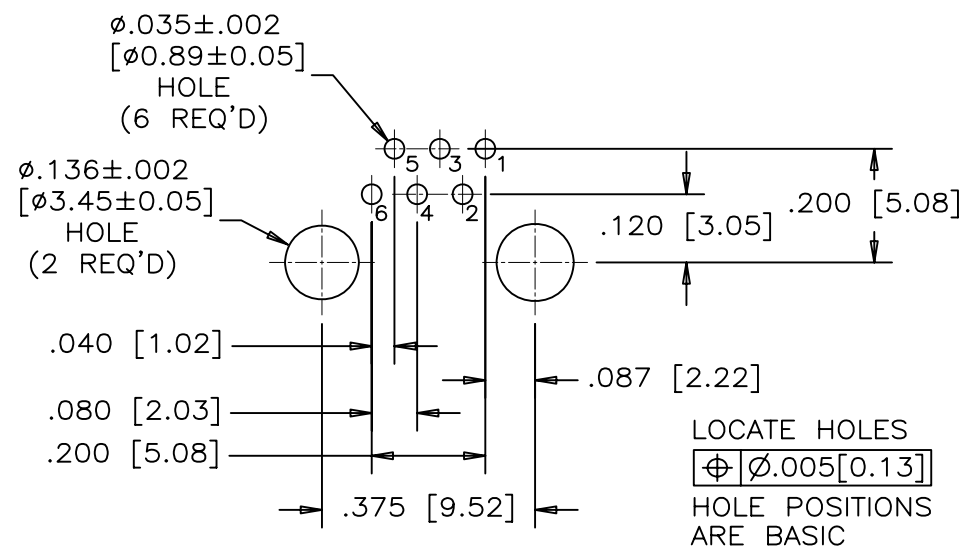

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

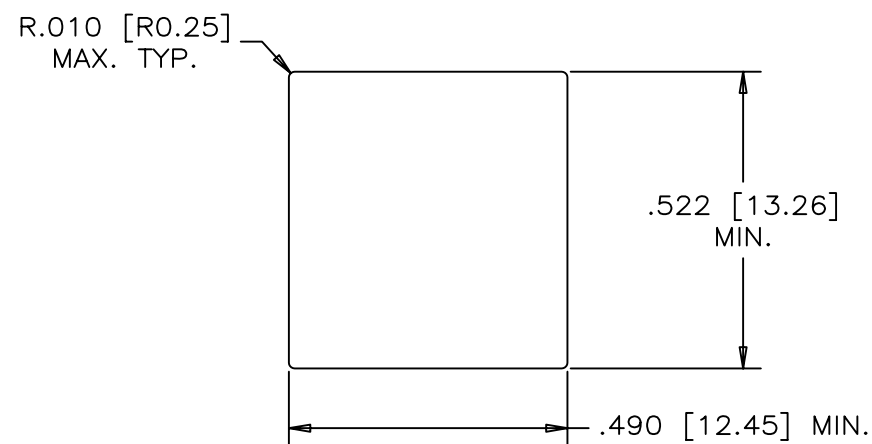

RECOMMENDED PANEL CUTOUT

PART NUMBER: RJE01-6X0-01

- CONTACT QTY.
2=2 CONTACTS
4=4 CONTACTS
6=6 CONTACTS

DRAWN PAUL WANG	DATE 06/03/29
DESIGNED	
CHECKED CHIGOW	06/03/29
I. E. APPRD.	
Q. A. APPRD.	
DWG. APPRD.	
ENG. REL. NO.	
REF.	
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554

Amphenol Canada Corp.	
TITLE HIGH SPEED MODULAR JACK,1 PORT, 6 POSITIONS,OPTIONAL CONTACTS, WITHOUT SHIELD - RoHS COMPLIANT	
DWG C	DRAWING NO. P-RJE01-6X0-01
SCALE	WT. ----- SURF. ----- SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.