

## Pin strip - PST 1,3/ 5-H-5,0 - 1705494

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Pin strip, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 5, pitch: 5 mm, color: black, contact surface: Tin, mounting: THR soldering, The maximum current depends on the plug used. The lower of the two current values apply for plug and pin strip. The pin strip is made of highly temperature resistant plastic and is thus suitable for the reflow process.



The figure shows a 10-position version of the product

### Why buy this product

- Suitable for wave and reflow soldering processes
- Optimum pin geometry for all COMBICON pin strip connectors

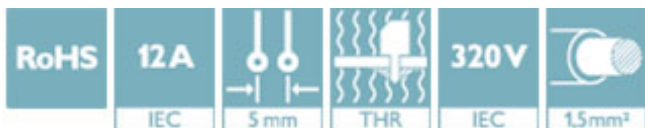

### Key Commercial Data

|                        |               |
|------------------------|---------------|
| Packing unit           | 100 STK       |
| Minimum order quantity | 50 STK        |
| GTIN                   |               |
| GTIN                   | 4046356073165 |

### Technical data

#### Dimensions

|                       |          |
|-----------------------|----------|
| Length [ l ]          | 12.5 mm  |
| Width                 | 25 mm    |
| Pitch                 | 5 mm     |
| Dimension a           | 20 mm    |
| Width [ w ]           | 25 mm    |
| Height [ h ]          | 2.8 mm   |
| Constructional height | 2.8 mm   |
| Pin dimensions        | ø 1.3 mm |
| Length                | 12.5 mm  |

#### General

|                   |              |
|-------------------|--------------|
| Range of articles | PST 1,3/..-H |
|-------------------|--------------|

# Pin strip - PST 1,3/ 5-H-5,0 - 1705494

## Technical data

### General

|  |                                 |
|--|---------------------------------|
| Insulating material group              | IIIa                            |
| Rated surge voltage (III/3)            | 4 kV                            |
| Rated surge voltage (III/2)            | 4 kV                            |
| Rated surge voltage (II/2)             | 4 kV                            |
| Rated voltage (III/3)                  | 250 V                           |
| Rated voltage (III/2)                  | 320 V                           |
| Rated voltage (II/2)                   | 400 V                           |
| Connection in acc. with standard       | EN-VDE                          |
| Nominal current $I_N$                  | 12 A (depends on the plug used) |
| Maximum load current                   | 12 A (depends on the plug used) |
| Insulating material                    | PA                              |
| Flammability rating according to UL 94 | V0                              |
| Color                                  | black                           |
| Number of positions                    | 5                               |

### Standards and Regulations


|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
|  | CUL    |
| Flammability rating according to UL 94 | V0     |

### Environmental Product Compliance


|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

Drilling diagram

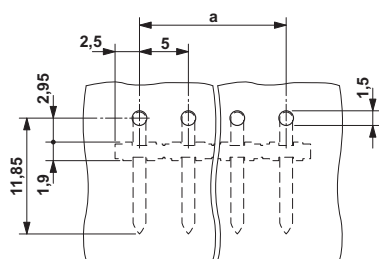

Dimensional drawing

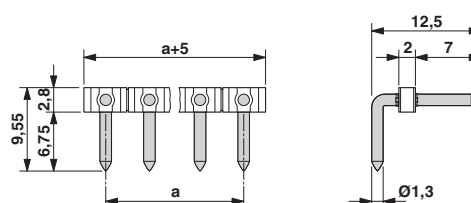

## Approvals

### Approvals

Approvals

EAC / cULus Recognized

# Pin strip - PST 1,3/ 5-H-5,0 - 1705494

## Approvals


---

Ex Approvals

---

### Approval details

|     |   |         |
|-----|---|---------|
| EAC |  | B.01742 |
|-----|---|---------|

|                    |   |   |                 |
|--------------------|---|---|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-20030211 |
|                    | D   | B   |                 |
| Nominal voltage UN | 300 V   | 300 V   |                 |
| Nominal current IN | 10 A  | 16 A  |                 |

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>