
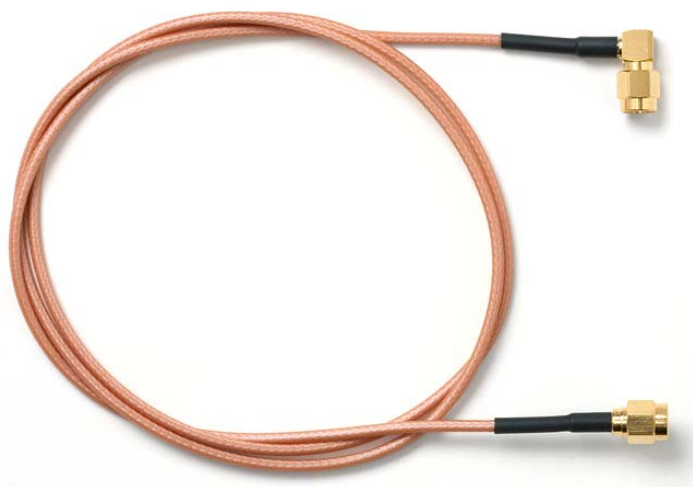


**Model 73069**  
**SMA Plug to SMA Right-Angle Plug, RG316/U**

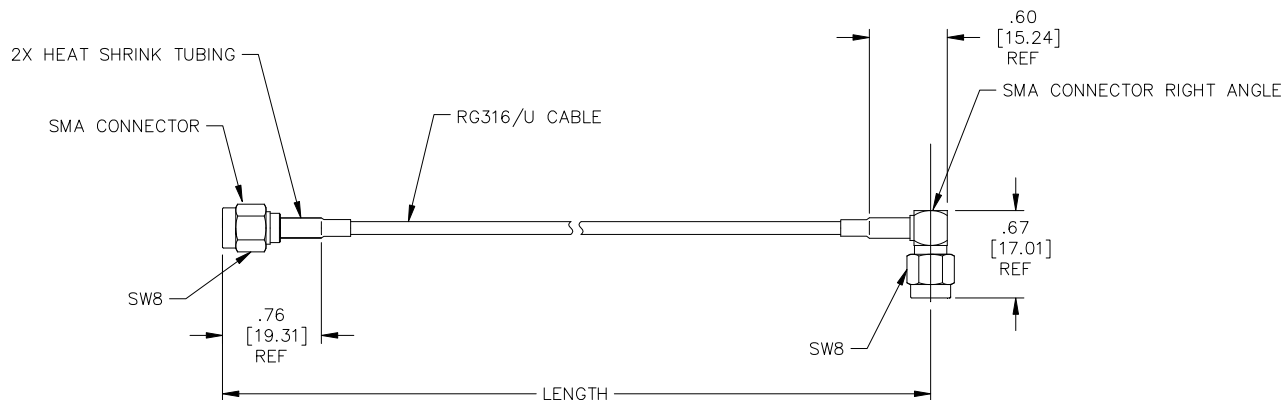

Model 73069  
SMA Plug to SMA Right-Angle Plug, RG316/U

**Materials**

SMA Male Connectors:  
Center Contact: Brass, Gold Plated  
Connector Body: Brass, Gold Plated  
Crimp Ferrule: Copper, Nickel Plated  
Insulators: PTFE

**Specifications**

<b>Cable Type</b>	RG316/U
<b>Impedance</b>	50Ω
<b>Frequency Range</b>	DC - 4GHz
<b>Insulation Resistance</b>	≥ 500 MΩ
<b>Insulator Withstand</b>	750V
<b>Temperature Range</b>	-65° C to +165°C (-85°F to +329°F)
<b>Jacket</b>	FEP
<b>Cable O.D.</b>	0.098" (2.5mm)
<b>Center Conductor (mm)</b>	7 x .18 silver coated copper covered steel

Small size, and durability for  
confident connections

**Features**

- DC - 4GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connections are required.

**Ordering Information**

Model: **73069**  
Cable Designator: **BB** = RG316/U  
Standard Lengths: **12", 24", 36", 48", 60"**  
- 12" ± .157" (305mm ± 4mm)  
- 24" ± .275" (610mm ± 7mm)  
- 36" ± .394" (914mm ± 10mm)  
- 48" ± .512" (1219mm ± 13mm)  
- 60" ± .630" (1524mm ± 16mm)  
Ordering Example: **73069-BB-48**, Cable is RG316/U with length of 48" (1219mm)

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.