
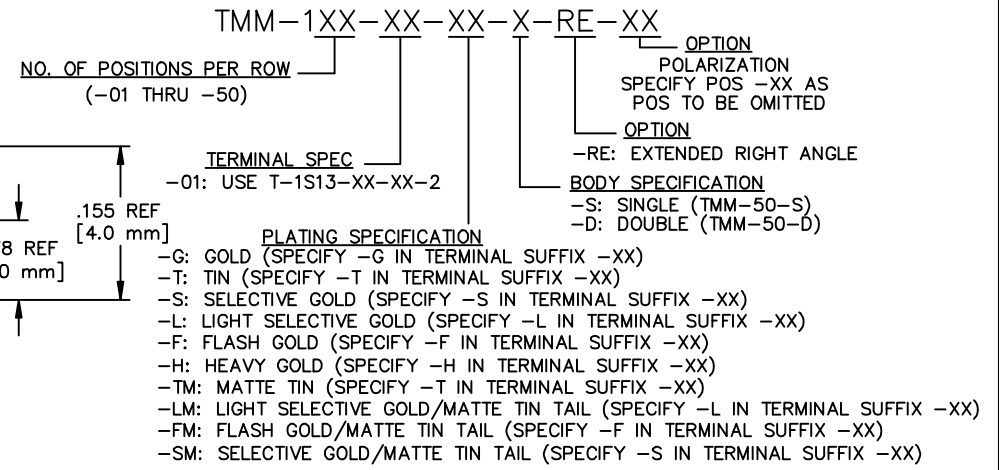
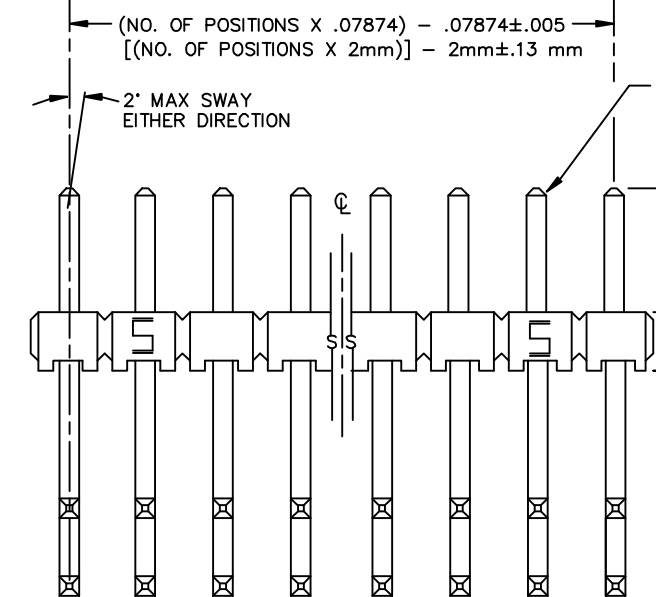


REVISION J

DO NOT SCALE FROM THIS PRINT

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED	TOLERANCES ARE:	TITLE: 2mm	DWG NO:
ONE PLACE DECIMALS ±.1 [2.5mm]	THREE PLACE DECIMALS ±.005 [0.13mm]		ANGLES ± 2°	TERMINAL STRIP ASSEMBLY (R/E)	TMM-1XX-XX-XX-X-RE-XX
TWO PLACE DECIMALS ±.010 [0.25mm]	FOUR PLACE DECIMALS ±.0020 [0.05mm]				SHEET 1 OF 1

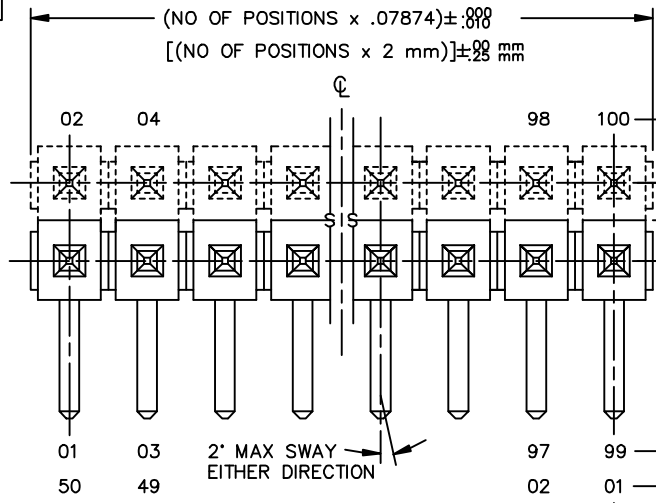

- NOTES:
- 1.) MAX. ALLOWABLE BOW: .005 IN/IN AFTER ASSEMBLY.
  - 2.) MAX. PIN ROTATION IN BODY: 2°
  - 3.) PUSHOUT FORCE SHALL BE 1 lb MIN.
  - 4.)  $\Delta$  REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL USE.
  - 5.) ALL DIMENSIONS IN BRACKETS [ ] TO BE MILLIMETERS.
  - 6.) NO BANDOLIER MARKS ARE ALLOWED IN THE POST AREA.
  - 7.) MAX CUT FLASH: .010 [0.25]

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

EXISPROD\ASSEMBLY\2mm TMM-RE

**samtec**

810 PROGRESS BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

MADE BY: GARY PURVIS 3-10-93

CHECKED BY:

ENG. APPROVAL

TMM-1XX-XX-XX-X-RE-XX

SHEET 1 OF 1

PLOT SCALE: 1=1