


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS
- 1.1 FREQUENCY RANGE: DC TO 12.4 GHz
- 1.2 MAXIMUM INPUT POWER:
AT +25°C: 2 WATTS
AT +125°C: 0.5 WATTS
- 1.3 OPERATING TEMPERATURE RANGE:
-55°C TO +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 MAXIMUM VSWR:
DC TO 4.0 GHz: 1.07:1
4.0 TO 12.4 GHz: 1.12:1

- 2.0 MARK UNIT AS SHOWN.
- 3.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

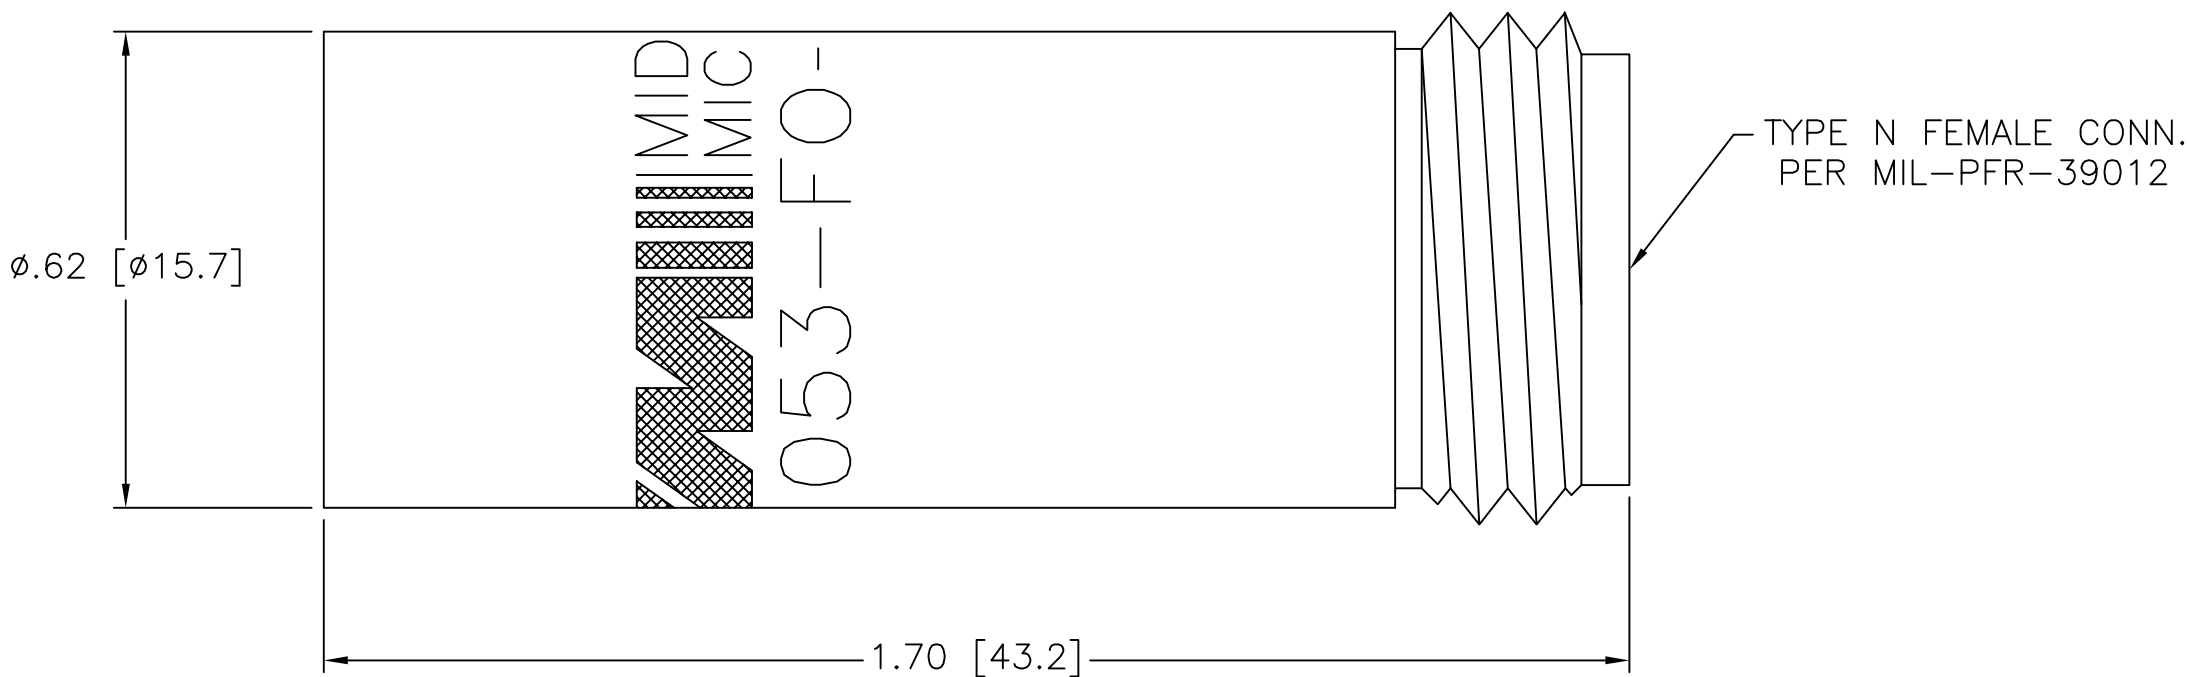

REV.	DESCRIPTION	DATE
-	RELEASED	3/21/79
A	ECR 6545	6/27/89
A1	ADD SPECS	3/30/92
B	ECN 13033	10/18/93
C	ECN 13362	5/16/94
C1	ADD TITLEBLOCK	10/28/05
D1	ECO 23381	3/14/11

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±2'</p>	<p>CAGE CODE</p> <p>34078</p>	<p>MIDWEST MICROWAVE</p>	
	<p>EMERSON Network Power Connectivity Solutions</p>	<p>TITLE</p> <p>TERMINATION OUTLINE DRAWING</p>	
<p>DRAWN/DATE</p> <p>A. BEATTY 3/30/92</p>	<p>ENG./DATE</p> <p>G. KOZAK 4/1/92</p>	<p>DRAWING NUMBER</p> <p>TRM-2053-FO-NNN-02-01</p>	
<p>CHECKED/DATE</p>	<p>APPROVED/DATE</p>	<p>SCALE: 4:1</p>	<p>SHEET 1 of 1</p>