THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST , 2005.
© COPYRIGHT 2005 By – ALL RIGHTS RESERVED.

LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F2	REVISED PER ECO-12-009825	19NOV12	KH	FB

1. SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
2. 50 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
3. FLASH Au PLATING OVER Ni PLATING OVER Cu PLATING
4. 0.8µm Au PLATING OVER Ni PLATING OVER Cu PLATING
5. Ni PLATING OVER Cu PLATING
6. TIN PLATING
7. RECOMMENDED SELF-TAPPING SCREW 221108-4
8. RECOMMENDED MOUNT NUT 1-1634816-0
9. RECOMMENDED LOCKWASHER 1-1634817-0
10. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
11. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED
12. OBSOLETE

BNC R/A PCB SHIELDED SOCKET 50 OHM WITH MOUNTING POSTS
(1-1337494-0 / 6-1337494-0 / 1-1337494-3 / 6-1337494-3/1-1337494-4)

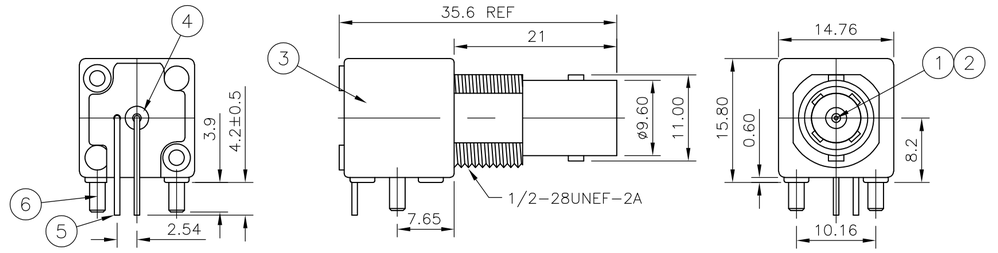

BNC R/A PCB SHIELDED SOCKET 50 OHM WITH BOARD LOCKS
(1-1337494-1 & 6-1337494-1)

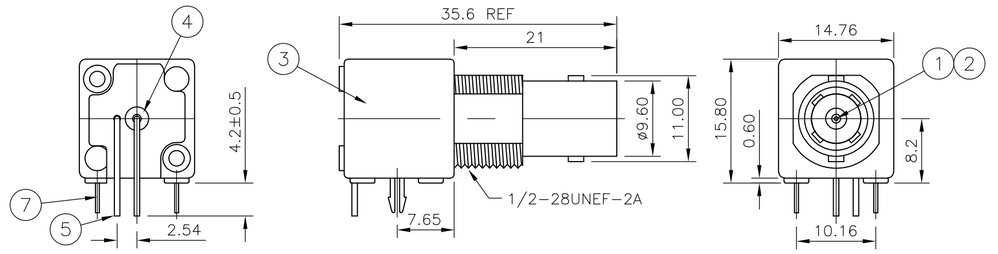

BNC R/A PCB SHIELDED SOCKET 50 OHM WITHOUT MOUNTING POSTS
(1-1337494-2 & 6-1337494-2)

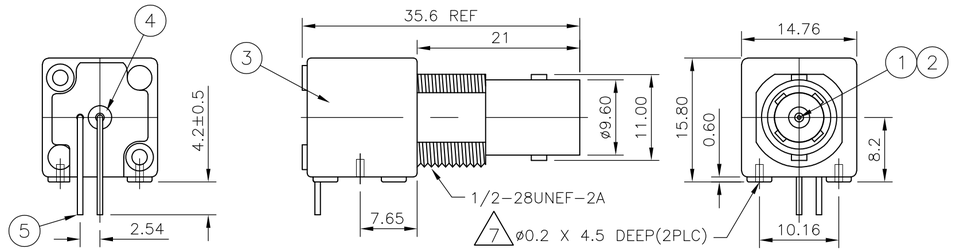





RECOMMENDED PCB LAYOUT
WITH MOUNTING POSTS OR BOARD LOCKS



RECOMMENDED PCB LAYOUT
WITHOUT MOUNTING POSTS



RECOMMENDED MOUNTING HOLE
MAX PANEL THICKNESS: 5.5mm



12											
1	–	–	–	–	–	–	–	–	STEEL 5	LOCK WASHER ⑨	9
1	–	–	–	–	–	–	–	–	BRASS 5	NUT ⑧	8
–	–	–	–	–	2	2	–	–	BRASS 6	BOARD LOCK	7
2	2	2	–	–	–	–	2	2	BRASS 6	MOUNTING POST	6
1	1	1	1	1	1	1	1	1	BRASS 6	SOLDER TAIL	5
1	1	1	1	1	1	1	1	1	PE-606	INSULATOR	4
1	1	1	1	1	1	1	1	1	ZINC ALLOY 5	BODY	3
–	1	1	–	–	–	–	–	–	BRASS 4	CONTACT	2
1	–	–	1	1	1	1	1	1	PHOSPHOR BRONZE 3	CONTACT	1
1--4	6--3	1--3	6--2	1--2	6--1	1--1	6--0	1--0	MATERIAL	DESCRIPTION	ITEM
1	2	1	2	1	2	1	2	1	QUANTITY PER ASSY	PARTS LIST	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.5
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN	RITA ZUO 14 Feb 09
CHK	ANSON MA 14 Feb 09
APVD	BOB ZHAO 14 Feb 09
PRODUCT SPEC	108-112000
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity

NAME: BNC R/A PCB SHIELDED SOCKET 50 OHM –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1337494	–

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV F2

1337494

1471-9 (3/11)