


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

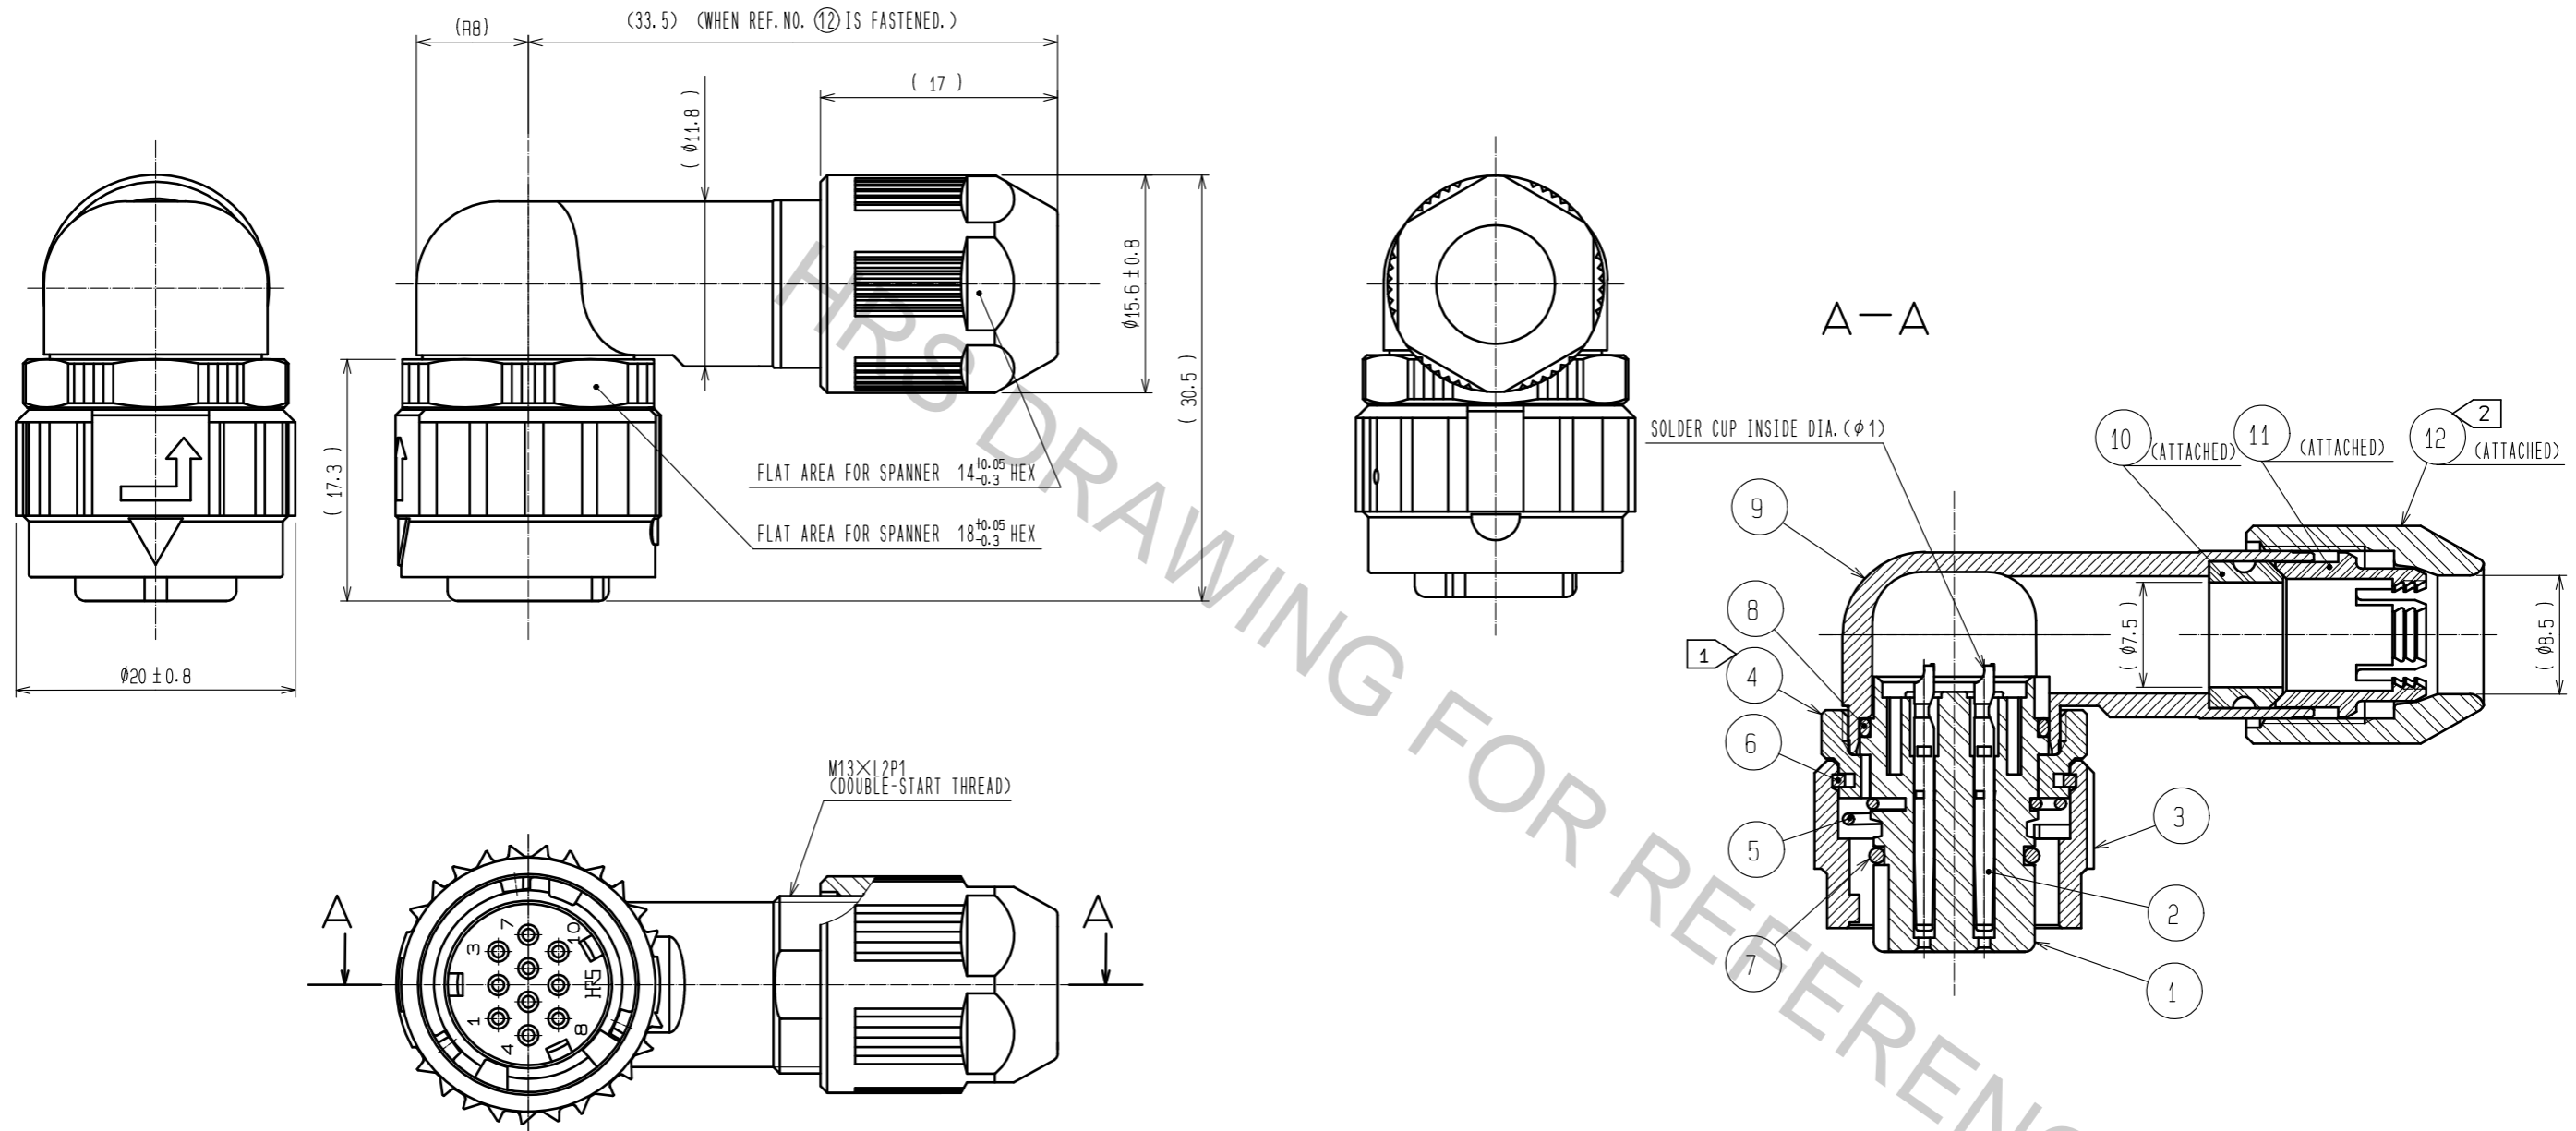

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ④ : 0.9 TO 1 N · m.
 THE RECOMMENDED ADHESIVE OF REF. NO. ④ : LOCTITE 243 MADE BY HENKEL JAPAN LTD.
 ② THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑫ : 0.9 TO 1 N · m.
 THE RECOMMENDED ADHESIVE AND PRIMER OF REF. NO. ⑫ : LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 3 ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ④, ⑨, AND ⑫.
 4 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.

5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE (BLACK) UL94V-0				
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE (WHITE) UL94V-0				
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER (GRAY)				
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2μm min. TERMINAL AREA : GOLD FLASH. UNDER PLATING : NICKEL 2μm min.	9	ALUMINIUM ALLOY NICKEL PLATING				
			8	ACRYLONITRILE BUTADIENE RUBBER (BLACK)				
			7	ACRYLONITRILE BUTADIENE RUBBER (BLACK)				
1	POLYPHENYLENE SULFIDE (BLACK) UL94V-0		6	PHOSPHOR BRONZE NICKEL PLATING				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS			
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI 18.02.26	CHECKED : HY. KOBAYASHI 18.02.26	DESIGNED : DS. MATSUNE 18.02.24	DRAWN : AI. NISHIYAMA 18.02.16	DRAWING NO. EDC-115934-31-00		
						PART NO. HR08D-12WLPB-10S(31)		
						CODE NO. CL108-0233-8-31		
						1/1		