

NGTD5R65F2

Fast Switching Rectifier Die

Fast switching low Vf rectifier die for free-wheeling applications.

Features

- Fast Switching
- Low Vf

Typical Applications

- Industrial Motor Control
- Solar PV Inverters

MAXIMUM RATINGS

| Parameter | Symbol | Value | Unit |
|--------------------------------|-----------|----------|------|
| Peak Reverse Voltage | V_{RRM} | 650 | V |
| Max Forward Conduction Current | I_F | (Note 1) | A |
| Maximum Junction Temperature | T_J | 175 | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Depending on thermal properties of assembly.

MECHANICAL DATA

| Parameter | Value | Unit |
|---|--|---|
| Die Size | 2232 x 2232 | μm^2 |
| Die Thickness | 10 | mils |
| Wafer Size | 150 | mm |
| Top Pad Size (Anode) | 1786 x 1786 | μm^2 |
| Top Metal (Anode) | 4 μm AlSi | |
| Back Metal (Cathode) | 2 μm TiNiAg | |
| Max possible chips per wafer | 2681 | |
| Passivation frontside | Oxide-Nitride | |
| Reject ink dot size | 25 mils | |
| Recommended storage environment: In original container, in dry nitrogen, or temperature of 18–28°C, 30–65%RH | Type: Bare Wafer in Jar Storage time: < 36 months | Type: Die on tape in ring-pack Storage time: < 3 months |

ORDERING INFORMATION

| Device | Inking? | Shipping |
|---------------|---------|--------------------|
| NGTD5R65F2WP | Yes | Bare Wafer in Jar |
| NGTD5R65F2SWK | Yes | Sawn Wafer on Tape |




ON Semiconductor®


www.onsemi.com

$V_{RRM} = 650 \text{ V}$
 $I_F = \text{Limited by } T_{J(\text{max})}$

DIODE DIE



DIE OUTLINE

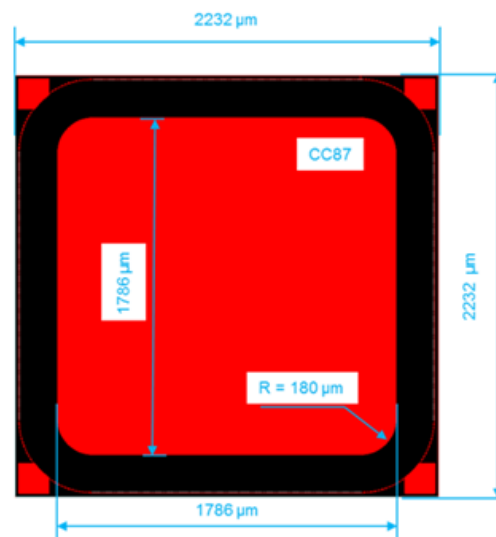


NGTD5R65F2

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, unless otherwise specified)

| Parameter | Test Conditions | Symbol | Min | Typ | Max | Units |
|-------------------------------|---|--------|------|-----|-----|---------------|
| STATIC CHARACTERISTICS | | | | | | |
| Forward Voltage | $I_F = 20\text{ A}$, $T_J = 25^\circ\text{C}$ | V_F | | 1.1 | 1.3 | V |
| Reverse Voltage | $I_R = 300\ \mu\text{A}$, $T_J = 25^\circ\text{C}$ | V_R | 650 | | | V |
| Reverse Current | $V_R = 650\text{ V}$, $T_J = 25^\circ\text{C}$ | I_R | -1.0 | | 1.0 | μA |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

DIE LAYOUT

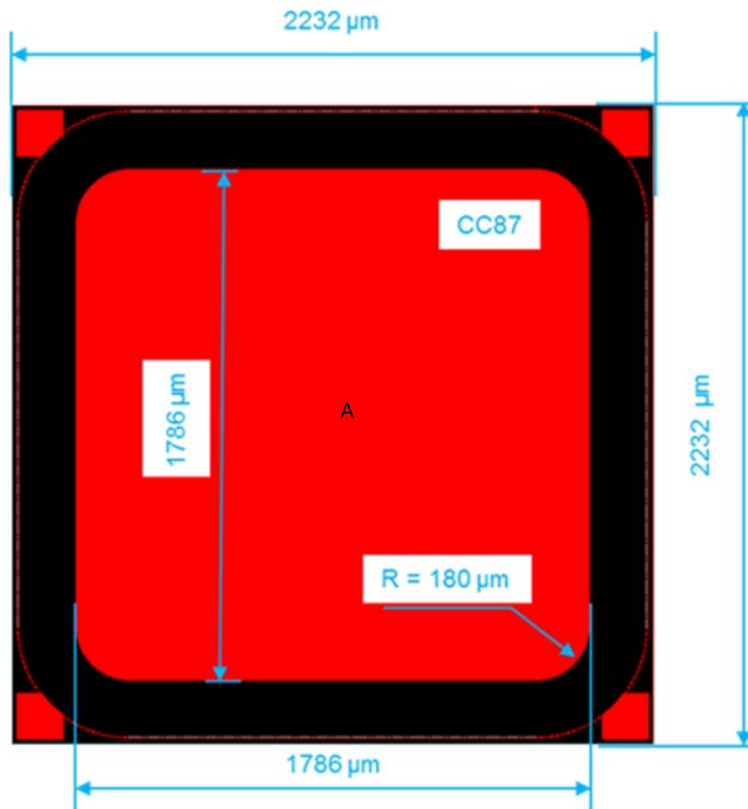


A = Anode pad
All dimensions in μm

NGTD5R65F2

Further Electrical Characteristic

Switching characteristics and thermal properties are depending strongly on module design and mounting technology and can therefore not be specified for a bare die.

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local
Sales Representative