

Printed-circuit board connector - MC 1,5/ 5-G-3,5 P26 THRR56 - 1788576

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.5 mm, Color: black, Contact surface: Tin, Assembly: Taped SMD/THT/THR components



Key commercial data

Packing unit	1 pc
Minimum order quantity	470 pc
Custom tariff number	85366990
Country of origin	Germany

Technical data

Product type	Printed circuit board housing
Approval	UL Recognized
	cUL Recognized
	GOST
	GOST
	cULus Recognized
Rated voltage (IEC)	160
Rated current (IEC)	8
Mounting type	Taped SMD/THT/THR components
Number of positions	5
Pitch	3.5 mm
Levels	Single-level
Type of locking	Without

Printed-circuit board connector - MC 1,5/ 5-G-3,5 P26 THRR56 - 1788576

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

ETIM

ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

Printed-circuit board connector - MC 1,5/ 5-G-3,5 P26 THRR56 - 1788576

Approvals

UL Recognized

	B	D
Nominal current I_N	8 A	8 A
Nominal voltage U_N	300 V	300 V

cUL Recognized

	B	D
Nominal current I_N	8 A	8 A
Nominal voltage U_N	300 V	300 V


GOST

GOST


cULus Recognized

Drawings

Drilling diagram

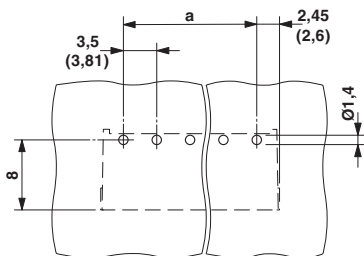


Dimensioned drawing

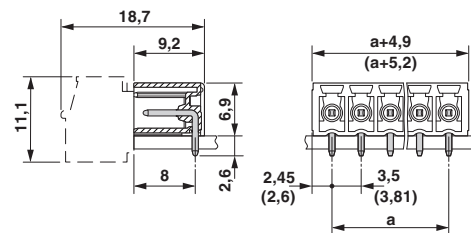

Printed-circuit board connector - MC 1,5/ 5-G-3,5 P26 THRR56 - 1788576

Diagram

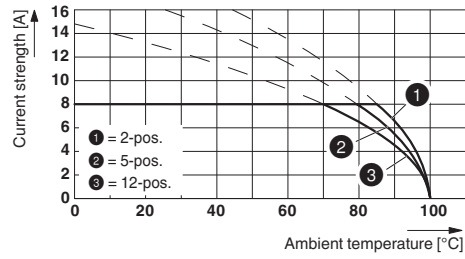

Type: FK-MCP 1,5/...-ST-3,81 with MC 1,5/...-G-3,81 P26 THR